

THE LIGHT AHEAD

ELINCHROM FLASH SYSTEM

Please read carefully the notes about this catalogue!

This catalogue may show images of products with accessories, which are not part of Sets or single units. Elinchrom Set and single unit configurations may change without advise and they might be different in other countries. Actual configurations please find at www.elinchrom.com

For further details, upgrades, news, the latest information about the Elinchrom System, please visit frequently the Elinchrom website. In the Support area, the latest user guides and technical specifications can be downloaded. Technical data, features and functions of Elinchrom flash units and the EL-Skyport system may change without advise.

Tolerances of specifications and components conform to IEC and CE standards. The listed values can differ due to tolerances in components, or measuring instruments. Technical data, subject to change. No guarantee for misprints.

The conception and photography of the Beauty & Fashion images in this catalogue are from Anoush Abrar & Aimée Hoving www.anoushaimee.com



EDITORIAL

Elinchrom has achieved many firsts in its 50 years of manufacturing but, as you read, you will see that innovation has not stopped.

BRX, D-Lite RX 2/4 and now D-Lite RX ONE open the way to anyone and everyone using computer control of units and Apple® owners to an application for hand held control.

The new Quadra Hybrid accepts heavier Lead-Gel or lightweight Lithium-Ion batteries as one may choose. Rotalux, the biggest selling brand of soft lightshapers are now available for most brands. After all, it is the accessories that create the image.

New developments await 2013. Watch this space – an old catchphrase – is still relevant as we begin our second half-century.

Welcome to our World.

Malcolm Whittle
CEO

CONTENTS

	Editorial Contents	
COMPACTS	Starters – D-Lite RX ONE	4
	Advanced – D-Lite RX 2 & 4	6
	Entry Professional – BRX	8
	Professional – Style RX	10
POWER PACKS	Digital RX	13
	Digital RX – Flashheads	14
BATTERY FLASH SYSTEM	Quadra Hybrid	17
	Quadra Hybrid – Accessories	18
	Ranger RX	21
	Ranger RX – Accessories	22
RADIO REMOTE SYSTEM	EL – Skyport	26
CONTINUOUS LIGHT	Scanlite	35
ACCESSORIES	Rotalux Softbox	38
	Special Effect Lights	41
	Indirect Softlites	42
	Reflector & Grids	44
	Softlites Reflectors	46
	Deflectors & Filter	47
	Umbrellas	48
	Tripods	50
	Tripods & Bags	51
	Cases & Tables	52
	Sync Cords	53
POWER SPECIFICATIONS	Last but not Least	56
EL-CHART		64



COMP- ACTS

D-LITE RX ONE



EL-Skyport
Compatible
See p. 26

Delivering approximately twice the power of speedlights, the D-Lite RX ONE is a small but robust compact flash from Elinchrom.

The versatility of the Elinchrom system remains in its accessory range: Whereas it is difficult to change the hard nature that characterizes speedlights, Elinchrom has some of the best accessories allowing the photographer to change the nature of their light.

Used outside the studio, the D-Lite RX ONE is the perfect creative companion to an existing Speedlight system, making use of the built-in intelligent slave cell to offer perfect flash synchronisation. This is the ONE, where it all begins...




D-Lite RX ONE — 100 Ws N° 20485.1

FEATURES

- Built-in EL-Skyport receiver for Radio triggering.
- EL-Skyport with 8 Frequency Channels with 4 Groups.
- EL-Skyport Speed Sync mode for synchronization up to a 1/320 s on enabled SLR cameras.
- Pre-flash detector system to enable the use of D-Lite RX ONE with speedlights.
- Power Auto-dump.
- 5V sync socket for maximum protection of digital cameras.
- Automatic temperature controlled ventilation.
- Multi-voltage auto-detection : 90-270 V (excluding modelling lamp).
- Visual Flash Confirmation option. The modelling lamp comes on to confirm the flash has been triggered.
- Proportionality adjustment of the modelling lamp range.
- Variable f-stop steps : 1/1, 1/2, 4/10, 1/3, 2/10 or 1/10 steps are available.
- Programmable ready beep function.
- Radio Remote Control of flash power settings, Modelling lamp on/off, Speed sync mode and Triggering.
- Take full control of your units settings with the EL-Skyport App via the optional WiFi module for iPod Touch®/iPad®/iPhone®!
- Additional features can be found when used with the EL-Skyport Software and the USB Transceiver RX such as Flash-Delay for strobing-effects.
- Firmware update option.
- Accessory bayonet accepting all accessories and Rotalux softboxes up to 135 cm.
- Stand bracket with extra umbrella fitting for larger umbrella shafts.

CONTROL PANEL

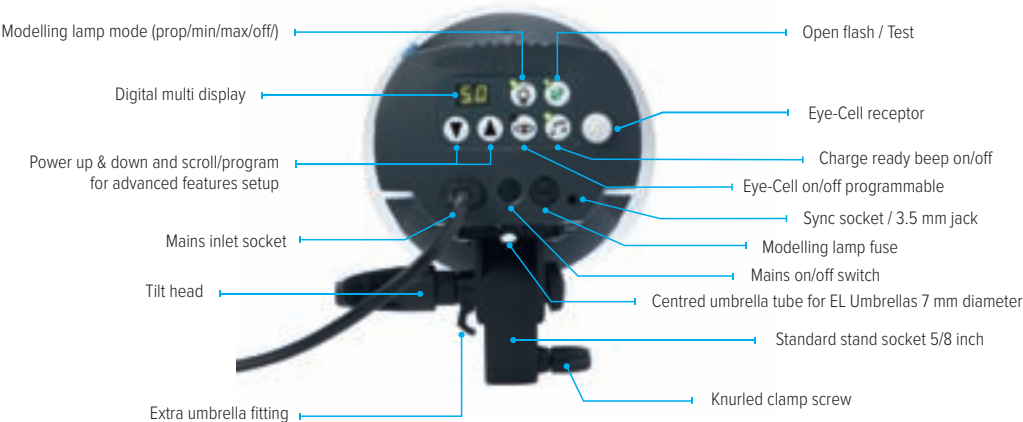

D-LITE RX ONE — SETS

The Softbox Set is ideal for use in small spaces where light control is essential to avoid unwanted reflections whereas the Umbrella Set is ideal for use in large halls and open spaces where speed of assembly is an advantage.



D-LITE RX ONE SOFTBOX SET

N° 20843.2

Qty	Code n°	Article
2x	20485.1	D-Lite RX ONE
1x	19350	EL-Skyport Transmitter Speed
1x	11088	Sync cable 5 m
2x	26129	Portalite Softbox 66 x 66 cm
1x	33194	Carrying bag for two D-Lite RX ONE
1x	30162	Tripod set 2 (2x 88 – 235 cm with bag)



D-LITE RX ONE UMBRELLA SET

N° 20844.2


Qty	Code n°	Article
2x	20485.1	D-Lite RX ONE
1x	19350	EL-Skyport Transmitter Speed
1x	11088	Sync cable 5 m
2x	26143	Reflector 16 cm / 90°
1x	26372	Umbrella White 85 cm
1x	26351	Eco Umbrella Translucent 85 cm
1x	33194	Carrying bag for two D-Lite RX ONE
1x	30162	Tripod set 2 (2x 88 – 235 cm with bag)

D-LITE RX

The D-Lite RX studio flash system is the entry range of the Elinchrom studio flash family. Whether you are new to lighting, already have speedlights or just want to take your photography to the next level, the D-Lite RX series provide all you need.

Ideal for small business applications, portraiture, for anyone interested in the art and creativity of lighting, these Swiss designed and tested units will not only give many years of satisfactory service and pleasure but also allow the upgrade to more advanced units if necessary.

The D-Lite is now RX functional, which means you can fully control your units with the EL-Skyport App on iPod Touch®/iPad®/iPhone® or with the EL-Skyport Software.



D-Lite RX 2 — 200Ws — N° 20486.1



D-Lite RX 4 — 400Ws — N° 20487.1

WHAT'S NEW

- Radio Remote Control of flash power settings, Modelling lamp on/off, Speed sync mode and Triggering.
- Take full control of your units settings with the EL-Skyport App via the optional WiFi module for iPod Touch®/iPad®/iPhone®!
- Additional features can be found when used with the EL-Skyport Software and the USB Transceiver RX such as Flash-Delay for strobing-effects.
- Visual Flash Confirmation option. The modelling lamp comes on to confirm the flash has been triggered.
- Proportionality adjustment of the modelling lamp range.
- Variable f-stop steps: 1/1, 1/2, 4/10, 1/3, 2/10 or 1/10 steps are available.
- Programmable ready beep function.
- Firmware update option.

FEATURES

- Built-in EL-Skyport receiver for triggering.
- EL-Skyport with 8 Frequency Channels with 4 Groups.
- EL-Skyport Speed Sync mode for synchronization up to a 1/320 s on enabled SLR cameras.
- Pre-flash detector system to enable the use of D-Lite RX with speedlights.
- Power Auto-dump.
- 5V sync socket for maximum protection of digital cameras.
- Automatic temperature controlled ventilation.
- Multi-voltage auto-detection: 90-270 V (excluding modelling lamp).
- Lightweight and strong housing. Robust, functional and elegant.
- Accessory bayonet accepting all accessories and Rotalux softboxes up to 135 cm.
- Rubberrised large handle with spare fuse storage.
- Stand bracket with extra umbrella fitting for larger umbrella shafts.

CONTROL PANEL



D-LITE RX — SETS

The D-Lite RX sets enable instant use for Studio photography. With only two bags, the complete studio is very portable and can be easily stored until next use. The 2/2 and the 4/4 kits come with two 66 x 66 cm softboxes and can be used with the optional Deflector Set to modify the nature of the light.



D-LITE RX 2/4 TO GO

N° 20840.2

Qty	Code n°	Article
1x	20486.1	D-Lite RX 2
1x	20487.1	D-Lite RX 4
1x	19350	EL-Skyport Transmitter Speed
1x	11088	Sync cable 5 m
2x	26143	Reflector 16 cm / 90°
1x	26350	Eco Umbrella Black & Silver 85 cm
1x	26351	Eco Umbrella Translucent 85 cm
1x	33198	Carrying bag for two D-Lite RX
1x	30162	Tripod set 2 (2x 88 – 235 cm with bag)

D-LITE RX 2 TO GO

N° 20841.2

Qty	Code n°	Article
2x	20486.1	D-Lite RX 2
1x	19350	EL-Skyport Transmitter Speed
1x	11088	Sync cable 5 m
2x	26129	Portalite Softbox 66 x 66 cm
1x	26143	Reflector 16 cm / 90°
1x	33198	Carrying bag for two D-Lite RX
1x	30162	Tripod set 2 (2x 88 – 235 cm with bag)



D-LITE RX 4 TO GO

N° 20842.2

Qty	Code n°	Article
2x	20487.1	D-Lite RX 4
1x	19350	EL-Skyport Transmitter Speed
1x	11088	Sync cable 5 m
2x	26129	Portalite Softbox 66 x 66 cm
1x	26143	Reflector 16 cm / 90°
1x	33198	Carrying bag for two D-Lite RX
1x	30162	Tripod set 2 (2x 88 – 235 cm with bag)

BRX

The BRX compact flash units are a further evolution of the features and quality that are Elinchrom. They are the “EL-500”’s of the digital era.

The concept is simple: control, power, speed and versatility. With many programmable features and the EL-Skyport remote system, the BRX enables photographers the greatest freedom to express their individuality. The BRX series deliver the quality of performance needed for a modern workflow.

Available in either 250Ws or 500Ws, they are perfect for portraiture, landscape, product and architectural photography.



EL-Skyport
Compatible
See p. 26



BRX 250 — 250Ws — N° 20440.1



BRX 500 — 500Ws — N° 20441.1

WHAT'S NEW

- Take full control of your units settings with the EL-Skyport App via the optional WiFi module for iPod Touch®/iPad®/iPhone®!
- Additional features can be found when used with the EL-Skyport Software and the USB Transceiver RX such as Flash-Delay for strobing-effects.
- Firmware update option.
- Updated electronics for even better performance than before!

FEATURES

- Built-in EL-Skyport receiver for triggering.
- EL-Skyport with 8 Frequency Channels with 4 Groups.
- EL-Skyport Speed Sync mode for synchronization up to a 1/320 s on enabled SLR cameras.
- Pre-flash detector system to enable the use of BRX with speedlights.
- Visual Flash Confirmation option. The modelling lamp comes on to confirm the flash has been triggered.
- Proportional, maximum, minimum and independent adjustment of the modelling lamp.
- Variable f-stop steps: 1/1, 1/2, 4/10, 1/3, 2/10 or 1/10 steps are available.
- Programmable ready beep function.
- Power Auto-dump.
- Automatic temperature controlled ventilation.
- Action flashtube for sharper images.
- Multi-voltage auto-detection: 90-270 V (excluding modelling lamp).
- 5V sync socket for maximum protection of digital cameras.
- High impact resistant body shell.
- Accessory bayonet allowing the complete range of light modifiers.
- Rubberised handgrip with built-in fuse storage.

CONTROL PANEL



BRX — SETS

The BRX basic sets all fit it to one bag for easy transportation. Optional stand sets are available depending on your needs such as 88-235 cm stands or air cushioned 102-264 cm stands. All sets come with two Portalites, which when combined with the optional deflector set take advantage of the unique Elinchrom central shaft.



BRX 250/500 TO GO

N° 20757.2

Qty	Code n°	Article
1x	20440.1	BRX 250
1x	20441.1	BRX 500
1x	19350	EL-Skyport Transmitter Speed
1x	11088	Sync cable 5 m
2x	26129	Portalite Softbox 66 x 66 cm
1x	33199	Tube bag for 2 BRX

BRX 250/250 TO GO

N° 20756.2

Qty	Code n°	Article
2x	20440.1	BRX 250
1x	19350	EL-Skyport Transmitter Speed
1x	11088	Sync cable 5 m
2x	26129	Portalite Softbox 66 x 66 cm
1x	33199	Tube Bag for 2 BRX



BRX 500/500 TO GO

N° 20758.2

Qty	Code n°	Article
2x	20441.1	BRX 500, mains cable, flashtube, modelling lamp
1x	19350	EL-Skyport Transmitter Speed
1x	11088	Sync cable 5 m
2x	26129	Portalite softbox 66 x 66 cm
1x	33199	Tube Bag for 2 BRX

OPTIONAL TRIPOD SETS


Qty	Code n°	Article
1x	30162	Tripod set 2 (2x 88 – 235 cm with bag)
1x	31051	Tripod Air Set (2x air cushioned 102 – 264 cm with bag)

STYLE RX

The Style series are professional digital performance Made In Switzerland.

Precise repeatability with ultra stable electronics controlled by large digital displays is Elinchrom's performance characteristic to now exceed the most demanding criteria. The range of Style RX units, with power variation from 1200Ws to 9Ws, withstand the most extreme and demanding condition.

The combination of super fast recycling time, action freezing flash durations and the complete consistency of performance ensure that photographers never miss a shot.



EL-Skyport
Compatible
See p. 26

FEATURES

- Ultra consistent performance for every digital application (multi and single shot digital imaging).
- 6 f-stop range.
- Rapid recycling times always maintaining stability.
- Action freezing flash durations at full power.
Style RX 300: 1/2850 s;
Style RX 600: 1/2050 s;
Style RX 1200: 1/1450 s
(all at t=0.5.)
- Proportional, maximum, minimum and independent adjustment of the modelling lamp.
- EL-Skyport: Radio remote control and triggering! Set flash power and switch on/off the modelling lamp with the ELS
- Transmitter Speed and the Transceiver RX.
- Unique control from an iPod Touch®/iPad®/iPhone® with the EL-Skyport App via the optional WiFi module.
- Remote your complete RX studio with the EL-Skyport Software, control up to 4 studios of 16 units with EL-Skyport RX equipped or access extra features like flash counter or flash delay for strobing effects.
- Low 5 V sync voltage protecting digital camera systems.
- Optional cable remote control with large digital LED feedback display of all functions!
- Dark grey, fire retardant, robust body shell encasing the cast alloy chassis.
- Lightweight elegance for easy out of studio use.

Style RX 300 — 300Ws
230 V — N° 20625.1s
110 V — N° 20725.1s



Style RX 600 — 600Ws
230 V — N° 20626.1s
110 V — N° 20726.1s



Style RX 1200 — 1200Ws
230 V — N° 20627.1s
110 V — N° 20727.1s



CONTROL PANEL

RX Hand Remote Control
N° 19342



STYLE RX — SETS

STYLE RX POWER AND CONTROL WITH THE EL-SKYPORT RADIO REMOTE SYSTEM

Style RX 300 / 600 Compact Set with EL-Skyport
230V — N° 20629.2 **110V** — N° 20729.2

Qty	230 V	110 V	Article
1x	20625.1s	20725.1s	Style RX 300, includes mains cable, modelling lamp, flash tube, sync cable 5 m
1x	20626.1s	20726.1s	Style RX 600, includes mains cable, modelling lamp, flash tube, sync cable 5 m
1x	19358	19358	EL Skyport Remote and Trigger Set, controls flash power, modelling lamp on/ of and trigger



Style RX 600 / 600 Compact Set with EL-Skyport
230V — N° 20628.2 **110V** — N° 20728.2

Qty	230 V	110 V	Article
2x	20626.1s	20726.1s	Style RX 600, includes mains cable, modelling lamp, flash tube, sync cable 5 m
1x	19358	19358	EL Skyport Remote and Trigger Set, controls flash power, modelling lamp on/ of and trigger

Style RX 1200 / 1200 Compact Set with EL-Skyport
230V — N° 20655.2 **110V** — N° 20755.2

Qty	230 V	110 V	Article
2x	20627.1s	20727.1s	Style RX 1200, includes mains cable, modelling lamp, flash tube, sync cable 5 m
1x	19358	19358	EL Skyport Remote and Trigger Set, controls flash power, modelling lamp on/ of and trigger

STYLE RX COMFORT SETS WITH CARRYING CASE AND ACCESSORIES

Qty	230 V	110 V	Article
1x	20643.2	20743.2	Style RX 300 / 300 Case Set
1x	20644.2	20744.2	Style RX 600 / 600 Case Set
1x	20645.2	20745.2	Style RX 1200 / 1200 Case Set

INCLUDED SET ACCESSORIES

Qty	Code n°	Article
2x	26143	Reflectors 90° 16 cm
1x	26061	Snoot & Grid
1x	26129	Portalite 66 x 66 cm
1x	33209	Elinchrom carrying case for three compacts or heads
1x	20564	Umbrella Stand Set, includes 2x EL-Tripods 88 – 235 cm, 1x silver umbrella 85 cm, 1x translucent umbrella, 1x carrying bag





POWER PACKS

DIGITAL RX

Elinchrom has a long tradition of excellent power packs designed for professional imaging.

The latest Digital RX series incorporates electronic know-how combined with high manufacturing quality at affordable prices. Highlights like feature control via MAC® / WIN® computers, remote control with the EL-Skyport App for iPod Touch® / iPad® / iPhone®, ultra stable circuitry for consistent flash power, low sync voltage to protect digital cameras are just some of the many advantages of these series.



EL-Skyport
Compatible
See p. 26

FEATURES

- EL-Skyport: Radio remote control and triggering! Set flash power and switch on/off the modelling lamp with the ELS Transmitter Speed and the Transceiver RX.
- Unique control from an iPod Touch®/iPad®/iPhone® with the EL-Skyport App via the optional WiFi module.
- Remote your complete RX studio with the EL-Skyport Software, control up to 4 studios of 16 units with EL-Skyport RX equipped or access extra features like flash counter or flash delay for strobing effects.
- Ultra stable circuitry for absolutely consistent flash power.
- Unique dedicated Zoom Pro HD flash head for heavy-duty use.
- High Speed Zoom Action and Zoom Pro heads for fashion and general purpose photography.
- Precise digital power display to complement advanced technology.
- Digital power values compatible with the Elinchrom system.
- Modelling lamps proportional or independent with display.
- Fast recycling consistent with precision and stability.
- Optional remote control 2-way read out. Extension cables are available for tracking and wall installations.
- Surge resistant circuits, Auto-Dump, twin sync sockets, ready beep, sensitive photocell, anti shock edgings and fan cooled.



Digital 1200 RX | 1200 Ws

230 V — N° 10256.1s

110 V — N° 10255.1s

Digital 2400 RX | 2400 Ws

230 V — N° 10258.1s

110 V — N° 10257.1s

RX Hand Remote Control

N° 19342



ZOOM HEADS

Elinchrom produced focusable flash heads back in the 60's. It was time to look again at this useful feature but using today's technology.

This head offers a microprocessor controlled, low noise fan cooling system, a new included transparent glass dome, a new user replaceable plug-in flashtube and a zoom function for the modelling lamp and flashtube, to obtain unique results when used with reflectors or a wide and even light distribution with Rotalux softboxes. The zoom function is accessible from both sides of the head housing. These heads are compatible with all power packs made by Elinchrom since 1979.



CARACTERISTICS & FEATURES

- Small UV coated flashtube diameters for short flash durations and better subject control.
- User replaceable plug-in flashtube.
- Included transparent security glass dome. An optional frosted glass dome is available.
- Zoom Heads can either be used with 110 V or 230 V Elinchrom power packs. The Halogen modelling lamp and fuse must conform to the correct voltage and value.
- Efficient inner dish reflector, with a 90° light distribution to maximise softbox performance.
- Zoom function for flashtube and modelling lamp for individual wider or more focused light beam when used with reflectors.
- Reflector-bayonet with breech locking ring, fits all Elinchrom reflectors since 1974. So do the huge EL-Reflector and Rotalux softbox range.
- Centered umbrella fitting with additional umbrella holder at the tilt head.
- Efficient low noise fan cooling. The fan spins slowly at low temperatures and fast when the head heats up.
- Illuminated on/off modelling lamp switch, with LED overheat indication. When the red warning LED lights up the halogen modelling lamp shuts off until the head cools down. The flash function is still active.
- Aluminium chassis with fire resistant housing.
- Extremely lightweight, only 2.3 kg, including the 5 m heavy-duty flash cable.



Zoom Pro HD

N° 20192

The ZOOM PRO HD is designed to withstand extreme frequency of use. The heavy-duty and high quality plug-in flashtube minimises the change in light characteristics and output. The ZOOM PRO HD is the best choice for catalogue and 3D turntable imaging. The ultimate performance for heavy users.

ZOOM Head Extension Cable

5 m — N° 21040

10 m — N° 21041



Zoom Action

N° 20193

The ZOOM ACTION offers a very short flash duration for action freezing photography. The new A (Action) tube delivers a 40-45% shorter flash duration compared to standard omega (horseshoe type) flashtubes. Action = Elinchrom.



Zoom Pro

N° 20191

The ZOOM PRO is designed for universal use photography and is equipped with a standard 3000Ws omega plug-in flashtube. All other features and functions are the same for all ZOOM head types. Best value for money.



Zoom Pro Hd — N° 24082
Flash Tubes Plug-In for ZOOM Heads



Zoom Pro — N° 24081



Zoom Action — N° 24083



Glass Dome Transparent
N° 24918

Included standard glass dome for the ZOOM flash head and ZOOM SCANLITE halogen.



Glass Dome Frosted
N° 24919

This frosted glass dome will soften edges of shadow and offer a wider even light distribution while protecting the halogen lamp.

SPECIAL FLASH HEADS



Twin X4
230 V — N° 20180
110 V — N° 20181

Twin cables and flashtubes extend the range of use. Both cables are connected to one unit to halve flash duration. The twin cables plugged into two Digital RX 1200 powers units give the power of one Digital RX 2400 with the recycling time of a Digital RX 1200. Connected to two Digital RX 2400 the light output is 4800 Ws!



X 6000 N
230 V — N° 20182
110 V — N° 20183

The flat twin interlocking flashtubes bring a focusable light source to high power users. Cabled into a single 6000 Ws power source, the flash duration is halved. Cabled into two 3000 Ws powers sources, faster flashes may be recycled quicker.

HALOGEN LAMPS

MAX. 300 W / 230 V Halogen GX 6.35 — N° 23022

MAX. 300 W / 110 V Halogen GX 6.35 — N° 23030


Ringflash Glass-Diffuser
N° 402.013

To modify the light character into a semi diffused light source, replace the protection glass filter with the matt glass diffuser.




Ringflash 3000
N° 20494

The RF 3000 is dedicated to Elinchrom power packs delivering up to a maximum of 3000 Ws per exposure. To retain ease of handling, the unit has a single 5 m power cable, which reduces the weight to approximately 1.9 kg. The universal camera adapter is fully adjustable and enables any 35 mm or medium format to be conveniently fitted. The Ringflash is a unique light source ensuring totally shadowless but concentrated illumination for high contrast or high key lighting. It's a very popular light source for fashion, beauty, industrial and advertising photography. To modify the light characteristic into a semi diffuse light source, replace the protection glass filter with the matt glass diffuser (402.013). To use the RF 3000 with the Ranger RX, the adapter cable 11095 is required.

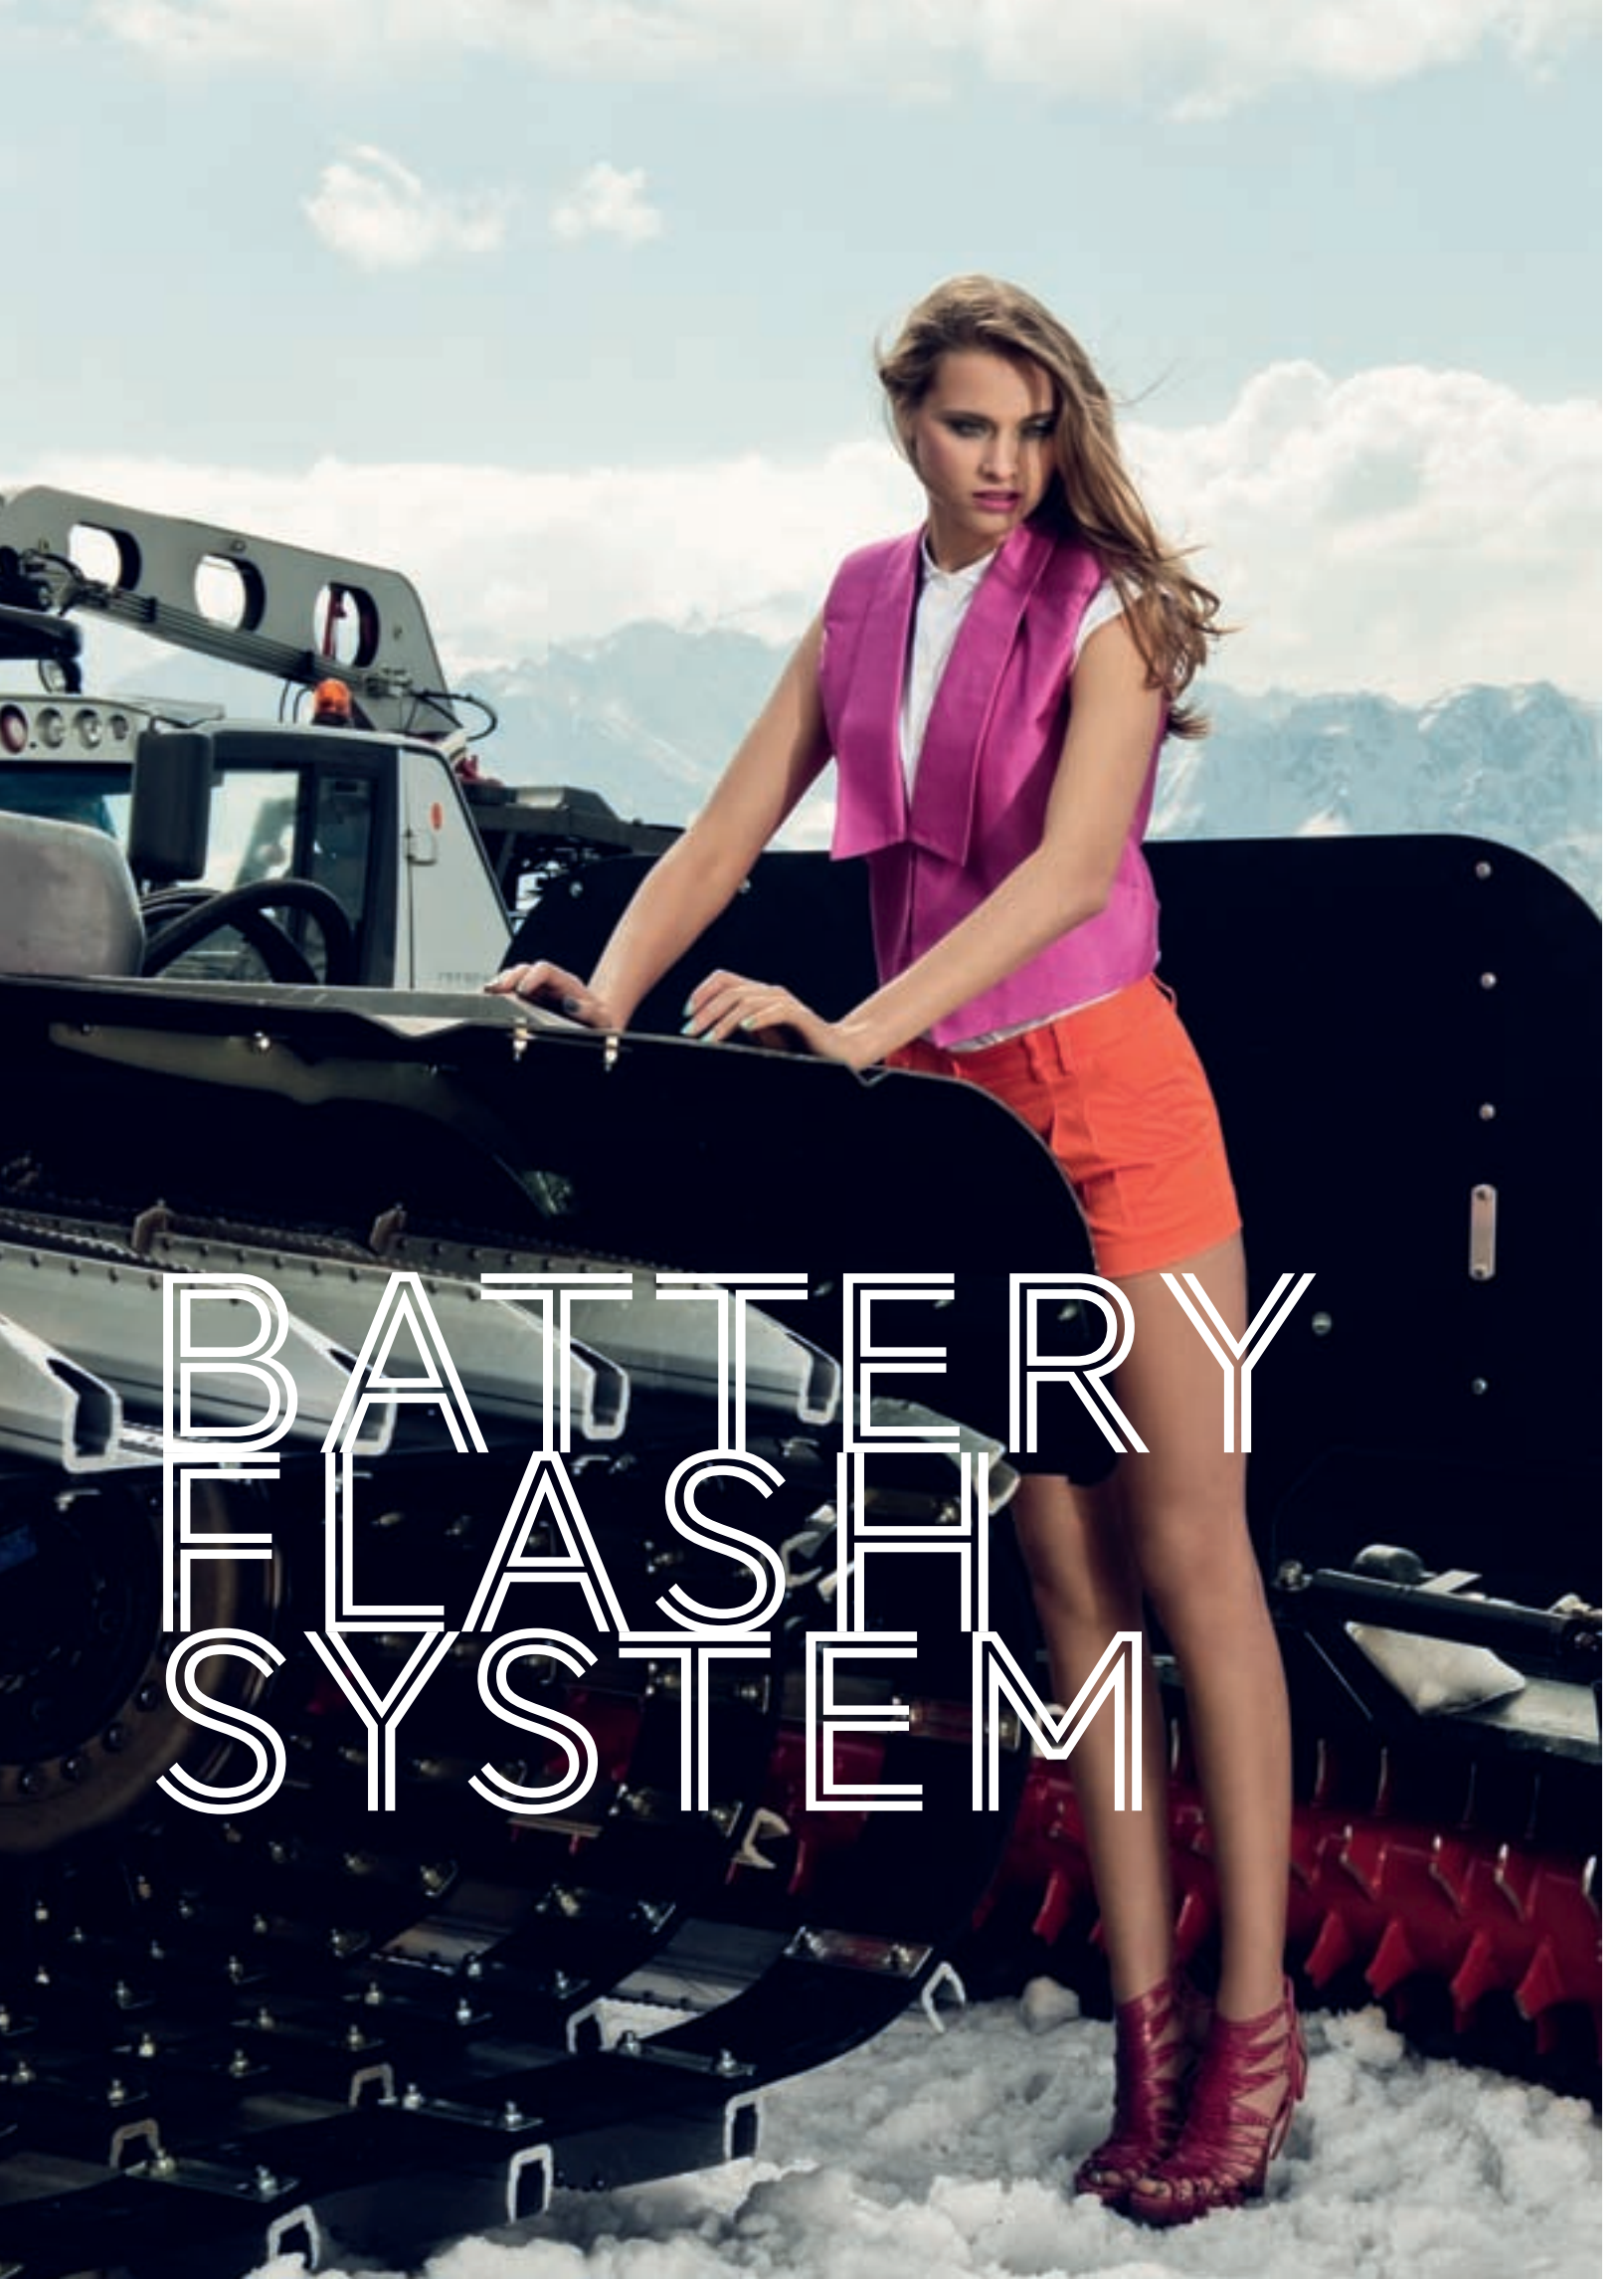

BATTERY FLASH SYSTEM

RANGER QUADRA
HYBRID AS RX



The new Ranger Quadra Hybrid AS RX is a compact portable 400Ws battery flash system for studio and outdoors use.

Complete with fast recycling times, wireless trigger and remote options via the EL-Skyport, the Quadra Hybrid really is a perfect system for anyone who likes to work away from the mains. Our latest firmware manages flash power consistency, remote power variation, LED modelling lamp and even more RX features than are currently available on any other unit.

The choice of the battery is up to the user. Lead-Gel batteries for low temperature robustness or Lithium-Ion batteries for light weight and high flash capacity. Two heads are available for the RQ system: an A (Action) head for action freezing flash durations and a S (Standard) head for general purpose photography.



Quadra Hybrid
N° 10266.1
with Lead-Gel battery

Quadra Hybrid
N° 10268.1
with Li-Ion battery


WHAT'S NEW

- Take full control of your units settings with the EL-Skyport App* for iPod Touch® / iPad® / iPhone® via the optional WiFi module!
- The Ranger Quadra Hybrid AS RX is compatible with Lead-Gel and Lithium-Ion batteries.
- Bright LED on the RQ Hybrid Flash Heads

FEATURES

- Built-in EL-Skyport radio receiver for triggering.
- EL-Skyport with 8 Frequency Channels with 4 Groups compatible with the ELS Transmitter Speed.
- EL-Skyport Speed Sync mode for synchronization up to a 1/320 s on enabled SLR cameras.
- Additional features can be found when used with EL-Skyport Software such as Flash-Delay for strobing-effects.
- Two power outlets – 2 : 1 ratio, Single high power channel and single superfast channel.
- Pre-flash detector system to enable the use of Quadra Hybrid with speedlights.
- Programmable ready beep function.
- Auto energy saver.
- 5V sync socket for maximum protection of digital cameras.
- Only 2 kg with Lithium battery and 3 kg with Lead-Gel!
- Super small and lightweight heads – compact and only 0.25kg!
- LED modelling lamp.
- Action flashtube for sharper images – reach an incredible 1/5700 th of a second with an Action head!
- With the EL-Reflector Adapter all accessories and Rotalux softboxes up to 135 cm can be used.

CONTROL PANEL

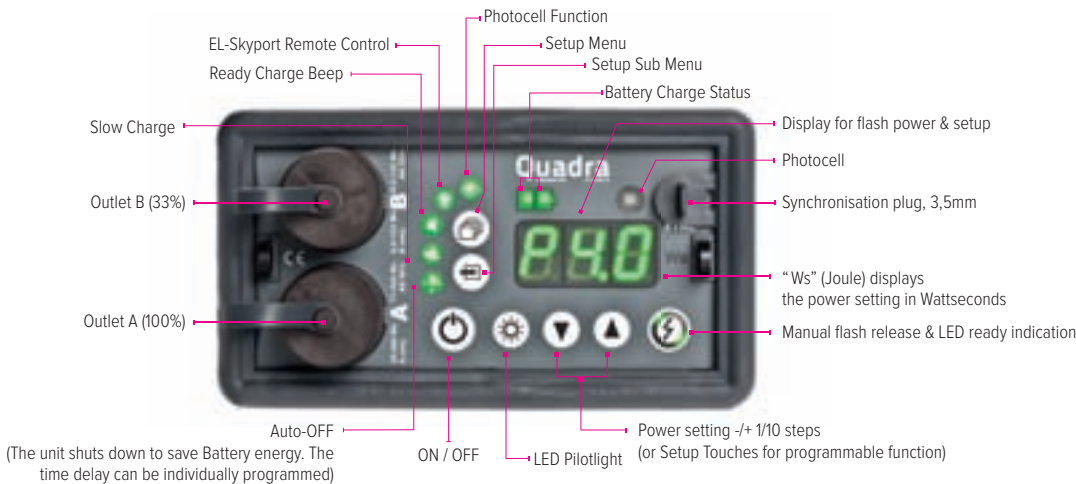

LEAD ACCESSORIES

RQ Lead Battery
12 V 3.6 Ah
N° 19294

This spare Lead-Gel battery is rock solid and offers up to 140 flashes at full power.



RQ Lead Car Charger 12 V
N° 11093

Charges the RQ Lead-Gel battery from the 12 V car outlets.



RQ Lead Charger
N° 19284

Dedicated charger for the RQ Lead-Gel battery. Includes mains adapters for EURO, UK and USA.



RQ Lead Set
N° 19298


This set includes a RQ Lead-Gel battery and a RQ Lead charger.



LITHIUM ACCESSORIES

RQ Lithium Battery
N° 19295

This spare Lithium-Ion battery is very lightweight and offers up to 320 flashes at full power.



RQ Lithium Car Charger
N° 11037

Charges the RQ Lithium-Ion battery from the 12 V car outlets.



RQ Lithium Charger
N° 19279

Dedicated charger to the RQ Lithium-Ion battery. Includes mains cable.



RQ Lithium Set – N° 19299

For existing RQ owners. This set includes a RQ Lithium-Ion battery and a RQ Lithium charger.



GENERAL ACCESSORIES

RQ Flash Head Cable
1.5 m – N° 11000
2.5 m – N° 11001 (standard cable)
3.5 m – N° 11002



RQ Adapter Cable for Ranger S/A Heads – N° 11036

Enables the use of flash heads of the Ranger RX system.



RQ Extension Cable & Ringflash ECO
1 m – N° 11005
2 m – N° 11006
5 m – N° 11003
10 m – N° 11004

NOTE: Extension cables reduce the power output and slow down the flash duration.



RQ Adapter Cable for Power Pack Heads
N° 11097

Enables the use of EL Power Pack Flash heads to RQ packs.



RQ Set Case
N° 33200

This carrying case for Quadra Sets has a new robust design, with pressure equalization valve, easy large lock opener and a rubberised large handle. This case will keep out dust, humidity and is crash proof. L x W x H : 55 x 18 x 48.5 cm



RQ Snappy
N° 19286

Offers carry comfort and protection. The Snappy requires the Shoulder Strap, which is included with every Quadra set.



Shoulder Strap
N° 19287

Air cushioned shoulder strap, adjustable, made of non-slip fabric.



GENERAL ACCESSORIES

RQ Hybrid Action Head N° 20134

Ultra lightweight and compact with detachable flash cable; plug-in A flashtube and LED pilot light for ACTION photography with ultra short flash duration.



RQ Hybrid Standard Head N° 20139

Ultra lightweight and compact with detachable flash cable; plug-in S flashtube and LED pilot light for universal outdoor photography.



RQ Ringflash ECO – N° 20492

This RQ Ringflash is as portable as a ringflash gets. Accepting up to 400 Ws with a standard 2-pole flashtube, the RQ Ringflash ECO is an ideal source for shadow free fashion and beauty photography. A white diffuser cap and a 2 m detachable cable are included. Optional extension cables up to 10 m for special situations are available.



RQ Ringflash PRO – N° 20495

The ultimate combination for in and outdoor photography! The RQ Ringflash PRO, a 4-pole flashtube, freezes movement with a 1/4500 s (t0.5) at full power. The 2 metre flash cable enables photographers to use it freehand. The 10 cm inner diameter will accept a wide range of cameras and lenses.



RQ-EL Reflector Adapter N° 26339

This adapter is required to use the complete and wide range of EL-reflectors, Rotalux softboxes (up to 100 cm), indirect light bank and other Elinchrom accessories.



RQ Portalite Octa 56 cm N° 26600

The RQ Portalite octagonal offers a wide soft light, ideal for portraiture beauty and people photography. Combined with the optional deflector set - gold, silver, translucent and frost - the softness / hardness and colour can be modified.

RQ Portalite 40 x 40 cm N° 26151

The RQ portalite is easy to set up and ultra transportable. This small size softbox offers a nice soft light when used with the outer diffuser. The access to the umbrella holder is maintained to allow for the use of deflectors.



RQ S Plug-In Flashtube N° 24009

High quality, long-life, S-Type (standard) flashtube for RQ Standard heads.



RQ A Plug-In Flashtube N° 24000

High quality, long-life, A-Type action) flashtube for RQ Action heads.



RQ Multi-function Cap N° 25100

Three in one: Protection for the LED and flashtube, frosted diffusion of light and filter support, which accepts coloured gelatin filters. The cap fits to the RQ 13.5 cm reflector.



RQ Reflector 70° 13.5 cm – N° 26145

This reflector, part of single heads and sets, offers a wide-angle light distribution as stand alone or umbrella reflector.



RQ Reflector 56° - 18 cm N° 26056

This reflector combines a high output with a good spread of light while the internal recess accepts 18 cm Grids and supports umbrellas.



QUADRA HYBRID – TO GO SETS

Battery Flash Systems

Quadra Hybrid sets with Action flash heads are ideal for sport photography, fashion photography and Action Freezing photography while sets with Standard flash heads are ideal for general use photography such as fashion photography, etc.



QUADRA HYBRID STANDARD SET

- A – Head with Lead-Gel Battery — N° 10407.1
- S – Head with Lead-Gel Battery — N° 10408.1
- A – Head with Lithium-Ion Battery — N° 10402.1
- S – Head with Lithium-Ion Battery — N° 10403.1

Qty	N°	Article
1x	10266.1 / 10268.1	Quadra Hybrid with Lead-Gel or Lithium-Ion Battery Supplied with Battery box, Charger, Sync cord and Shoulder Strap
1x	20134 / 20139	RQ Hybrid Head A or S Supplied with 2.5 m flash cable, modelling Reflector 13.5 cm and Multifunction Cap

QUADRA HYBRID PRO SET

- A – Heads with Lead-Gel Batteries — N° 10405.1
- S – Heads with Lead-Gel Batteries — N° 10406.1
- A – Heads with Lithium-Ion Batteries — N° 10400.1
- S – Heads with Lithium-Ion Batteries — N° 10401.1

Qty	N°	Article
1x	10266.1 / 10268.1	Quadra Hybrid with Lead-Gel or Lithium-Ion Battery Supplied with Battery box, Charger, Sync cord and Shoulder Strap
2x	20134 / 20139	RQ Hybrid Head A or S Supplied with 2.5 m flash cable, modelling Reflector 13.5 cm and Multifunction Cap
1x	19350	EL-Skyport Transmitter Speed
1x	19294 / 19295	Spare RQ battery/ Lead-Gel or Lithium-Ion depending on set choice.
1x	33200	RQ Set Case



RANGER QUADRA RINGFLASH SET

The Quadra Hybrid Ringflash Set is ideal for many applications such as Fashion, Portrait, Nature, Medical, Dental and Research imaging.




RANGER QUADRA RINGFLASH SET

- Quadra Hybrid Ringflash Eco Set with Lead-Gel Battery — N° 10409.1
- Quadra Hybrid Ringflash Eco Set with Lithium-Ion Battery — N° 10404.1

Qty	N°	Article
1x	10266.1 / 10268.1	Quadra Hybrid with Lead-Gel or Lithium-Ion Battery Supplied with Battery box, Charger, Sync cord and Shoulder Strap
1x	20492	RQ Ringflash ECO Supplied with UV coated plastic protection filter, white Plexiglas dif-fuser and detachable 2 m flash cable
1x	19350	EL-Skyport Transmitter Speed

RANGER RX



The Ranger RX, Speed and Speed AS units are 1100Ws portable battery pack units. The basic unit is smaller and therefore lighter whereas the Speed units will recycle to full power in 2.9 seconds and deliver up to 250 flashes at full power. The Speed unit is available with either a symmetrical or a 2:1 asymmetrical output to allow fast flash duration. The power range is 7 f-stops to allow precise control of light.

Incorporating the most advanced miniaturized components weighing in at only 8 kg – much lighter and smaller than any comparable unit – and controllable by EL-Skyport remote control, by Idevices, computer or by handset, the Ranger RX increase enormously the ease of using light on location.

FEATURES

- EL-Skyport: Radio remote control and triggering! Set flash power and switch on/off the modelling lamp with the ELS Transmitter Speed.
- Unique control from a iPod Touch®/iPad®/iPhone® with the EL-Skyport App via the optional WiFi module!
- Remote your complete Ranger RX units with the EL-Skyport Software, control up to 4 studios of 16 units with EL-Skyport RX equipped or access extra features like flash counter or flash delay for strobing effects.
- Consistent flash power at any power level.
- 7 f-stop range.
- Power saving, auto cut off to save energy.
- Modelling lamp modes: 15s, 30s & off.
- Photocell – adapted to release in bright ambient light.
- Auto Dump.
- Power saving mode: Auto switch off.
- Battery box quick release, replace batteries in seconds.
- Fast battery recharging time: 3 hours to full power!
- No memory effect on the battery. The electronics protect the battery from over and complete discharging.
- Battery charger indicator, two green LED show 100%, one green 50% and one red LED 10%.
- Multivoltage charger with European, USA and UK adapters.
- Moisture resistant rubber protectors.
- Raised sockets complete with cover: the electronics are only in the upper part of the unit.



Ranger RX — N° 10263.1s




Ranger RX Speed — N° 10265.1s



Ranger RX Speed AS — N° 10267.1s

	Ranger RX	Ranger RX Speed	Ranger RX Speed AS
Power Distribution	Symmetrical		Asymmetrical, 2:1 ratio
Power range Ws	17 – 1100		5.7 – 1100
Recycling, fast in s.	5.5 s	3.0 s	3.0 s
Autonomy max. / min. power	140 – 3800	250 – 5100	
Weight	6.5 kg	8 kg only, smallest unit in this class	

CONTROL PANEL

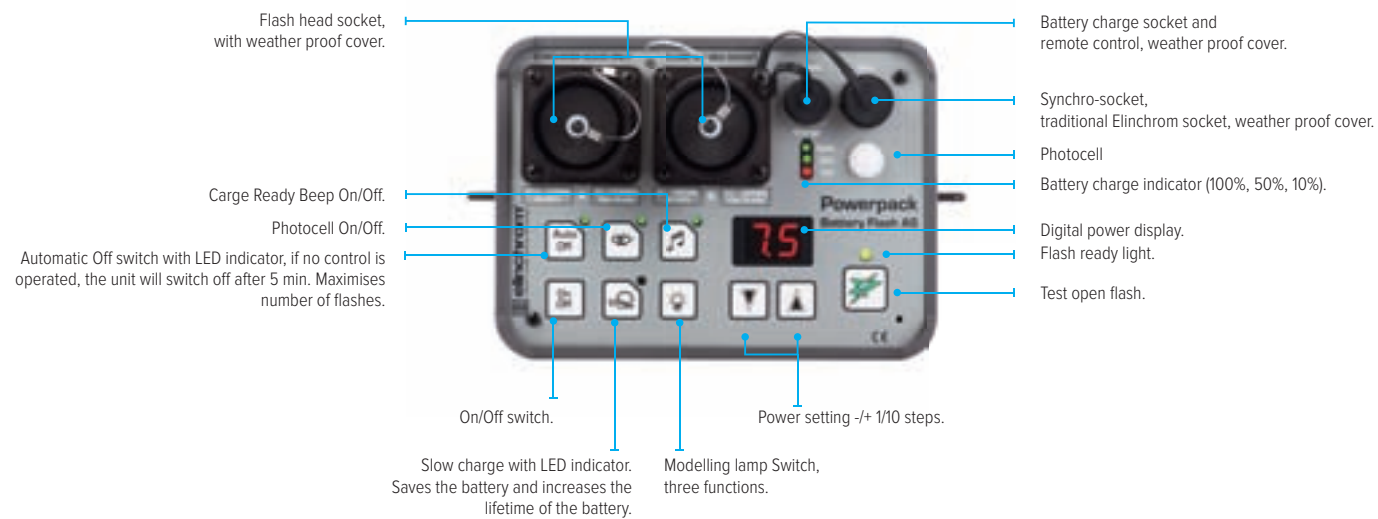

ACCESSORIES FOR RANGER RX,
RX SPEED AND RX SPEED AS



**Ranger RX S
Standard Head**
N° 20100
For universal use,
head with a long-life
flash tube.



**Ranger RX A
Action Head**
N° 20101
Unique super short flash duration,
with a single, twin electrode flashtube
to ensure even light distribution.



Ranger Ringflash 1500
N° 20493
The ultimate combination for in and
outdoor photography! The Ringflash 1500,
a 4-pole flashtube, freezes movement with
a 1/2600 s (t0.5) at full power. The 2 metre
flash cable enables photographers to use
it freehand. The 10 cm inner diameter will
accept a wide range of cameras and
lenses.



EL-Power Pack Case
N° 33215
This case fits Ranger RX
or Digital RX power packs
and two of their flash heads.



EL Ranger Snappy
N° 19288
The Ranger Snappy is a
lightweight and easy to
fit carrying option with an
ergonomically designed
shoulder strap. Fits to all
Ranger RX models.



Shoulder Strap
N° 19289



Ranger RX Hand Remote

N° 19343

Includes a 1.6 m Ranger RX Remote Cable. The Hand Remote Control enormously increases the flexibility of "Ranger RX" flash units. The integrated highly sensitive photocell and the 3.5 mm sync socket, controls and triggers RX flash units at long distances, in almost all functions. (Slow charge and the head A or B selection for is not available. Only the MAC® / WIN® software operates all functions).



Ranger A/S Extension Cable

N° 11096

4 m only for Ranger S and A flash heads.

Car Battery Charger 12V

N° 11093

This device charges the Ranger RX batteries from any 12 V car accessory plugs.



For EL-Skyport & Hand Remote

Remote cable 1.6 m — N° 11106

Remote cable 3.2 m — N° 11107

Remote cable 6.4 m — N° 11108

Ranger RX Adapter cable 20 cm — N° 11110

EL-Skyport Transceiver RX Adapter — N° 19374

The Remote Adapter is required for the EL- Skyport Transceiver RX.



Ranger Adapter Cable

N° 11095

Adapts EL Power Pack flash heads to the Ranger RX battery packs. (Mains modelling lamp and fan are deactivated.)

ACCESSORIES ONLY FOR RANGER RX



Battery Box

N° 19290

Includes the battery for approximately 140 flashes at full power.



Multivoltage Quickcharger

N° 19293

With UK, EURO, USA multi-socket adapters.

Car Battery Supply 12V

N° 11094

This device connects to any 12 V car battery and replaces the internal Ranger RX battery.

Used with a standard 55 Amp / h car battery, about 600 – 800 full power flashes can be released, depending on the battery condition. Integrated protection circuit against reversed polarity.



ACCESSORIES ONLY FOR RANGER RX SPEED & SPEED AS



Multivoltage Quickcharger

N° 19283

Only for Ranger RX Speed & Ranger RX Speed AS.



Battery Box

N° 19280

Includes the battery for approximately 250 flashes at full power.

BASIC SETS			PRO SETS
RANGER RX TO GO ACTION SETS			
Qty	N°	Ranger RX / A - Head To Go N° 10274.1	Ranger RX / A - Head To Go Case Set N° 10285.1
1x	10263	Ranger RX, incl. shoulder strap, battery box sync cord, Multivoltage charger, EL-Skyport Remote Adapter	
1x	20101	Ranger A – Head, 50 W modelling lamp, 3 m flash head cable	
1x		–	see description A below
Qty	N°	Ranger RX Speed / A - Head To Go N° 10275.1	Ranger RX Speed / A - Head To Go Case Set N° 10286.1
1x	10265	Ranger RX Speed, incl. shoulder strap, battery box sync cord, Multivoltage charger, EL-Skyport Remote Adapter	
1x	20101	Ranger A – Head, 50 W modelling lamp, 3 m flash head cable	
1x		–	see description B below
Qty	N°	Ranger RX Speed AS / A - Head To Go N° 10276.1	Ranger RX Speed AS / A - Head To Go Case Set N° 10287.1
1x	10267	Ranger RX Speed AS, incl. shoulder strap, battery box sync cord, Multivoltage charger, EL-Skyport Remote Adapter	
1x	20101	Ranger A – Head, 50 W modelling lamp, 3 m flash head cable	
1x		–	see description B below

RANGER RX TO GO STANDARD SETS			
Qty	N°	Ranger RX / S-Head To Go N° 10271.1	Ranger RX / S-Head To Go Case Set N° 10280.1
1x	10263	Ranger RX, incl. shoulder strap, battery box sync cord, Multivoltage charger, EL-Skyport Remote Adapter	
1x	20100	Ranger S – Head, 50 W modelling lamp, 3 m flash head cable	
1x		–	see description A below
Qty	N°	Ranger RX Speed / S-Head To Go N° 10272.1	Ranger RX Speed / S-Head To Go Case Set N° 10281.1
1x	10265	Ranger RX Speed, incl. shoulder strap, battery box sync cord, Multivoltage charger, EL-Skyport Remote Adapter	
1x	20100	Ranger S – Head, 50 W modelling lamp, 3 m flash head cable	
1x		–	see description B below
Qty	N°	Ranger RX Speed AS / S-Head To Go N° 10273.1	Ranger RX Speed AS / S-Head To Go Case Set N° 10282.1
1x	10267	Ranger RX Speed AS, incl. shoulder strap, battery box sync cord, Multivoltage charger, EL-Skyport Remote Adapter	
1x	20100	Ranger S – Head, 50 W modelling lamp, 3 m flash head cable	
1x		–	see description B below

INCLUDED IN ALL CASE SETS

Qty	N°	A	B
1x	26386	Varistar Umbrella Set 85 cm, includes Varistar Reflector 24 cm	Varistar Umbrella Set 85 cm, includes Varistar Reflector 24 cm
1x	26144	Reflector 18 cm / 60°	Reflector 18 cm / 60°
1x	33215	EL-Carrying Case	EL-Carrying Case
1x	19280	–	Spare Battery Box



Basic Sets



Pro Sets B

RADIO REMOTE SYSTEM



EL-SKYPORT SYSTEM

The EL-Skyport system allows the photographer to break free from sync cords and unreliable IR systems. Many improvements have been done to the EL-Skyport system since its launch.

Various levels of function and control are available depending on the units you have : The Universal receiver module can trigger cameras via optional shutter release cables and is compatible with all Elinchrom classic units, most speedlights and most of other flash brands for triggering.

Units with the built-in Skyport such as D-lite RX One, D-Lite RX 2/4, BRX 250/500 and Ranger Quadra Hybrid can be triggered and have the additional option of power settings and modelling lamp on/off.

The Style RX series, the Digital RX series and the Ranger RX series all require the Transceiver RX module to be triggered whereas the control of power settings and modelling on/off are also available. On these units, the SPEED sync mode can be activated via the EL-Skyport Software 3.0.

DISTANCE RANGE

Indoors Range

Up to 60 m in Normal sync mode.
Up to 40 m in Speed sync mode.

Outdoors Range

Up to 120 m in Normal sync mode.
Up to 70 m in Speed sync mode.

FEATURES

Available programmable features depend on the RX flash unit and Firmware.

From any of the three RX Remote Control Points, following features are available :



RX Remote Control Features

- Flash Triggering
- Flash power up/down settings
- Modelling Lamp on/off
- Groups / Frequency Channels
Select 4 working groups 8 frequency channels to separate working areas.
- Normal or Speed sync mode



Additional Features with WiFi Module & Mobile Application

- Photocell on/off
- Eye-Cell
Pre-flash management
- Ready Sound on/off
Ready flash confirmation
- Slow Recharging
- Auto Off
For Quadra & Ranger, to save battery power
- Head Socket Selection
for power packs
- Stand By
- Proportional Modelling Lamp Setup



Additional Features with EL-Skyport Computer Software

- Photo Job
the Virtual Studio Management simulates, saves and restores studio lighting setups. Unit settings can be applied automatically.
- Flash Delay programmable
- Flash Sync Sequence
programmable for up to 20 flash units per second
- Flash Counter
registers the total number of flashes the unit ever made, useful for rental and service.
- Temperature Display
indicates the internal temperature of the flash unit.
- Firmware Update option for RX units.
- On/Off Counter
useful information for rental and service.

LEGEND

RX Remote Control

The continuous lines are showing controllable RX features. The available RX features are depending on the EL-Skyport module, the flash unit type and the Firmware version.

Universal Receiver Speed


The dashed lines are showing the general basic features of the Universal Receiver Speed.

RX Remote Control Points

The Transmitter Speed, EL-Skyport computer software and the application for mobile devices can operate and control features and functions of RX flash units, by using the optional USB RX and WiFi modules.

RX Communication Nodes

Are showing the EL-Skyport modules, which enable communication between RX flash units and remote control points such as computers or mobile devices.

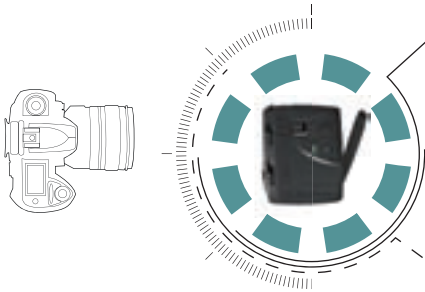


EL-Skyport Transmitter Speed

N° 19350

RX Remote Control Features

EL-SKYPORT - REMOTE CONTROL SYSTEM

Radio Remote System

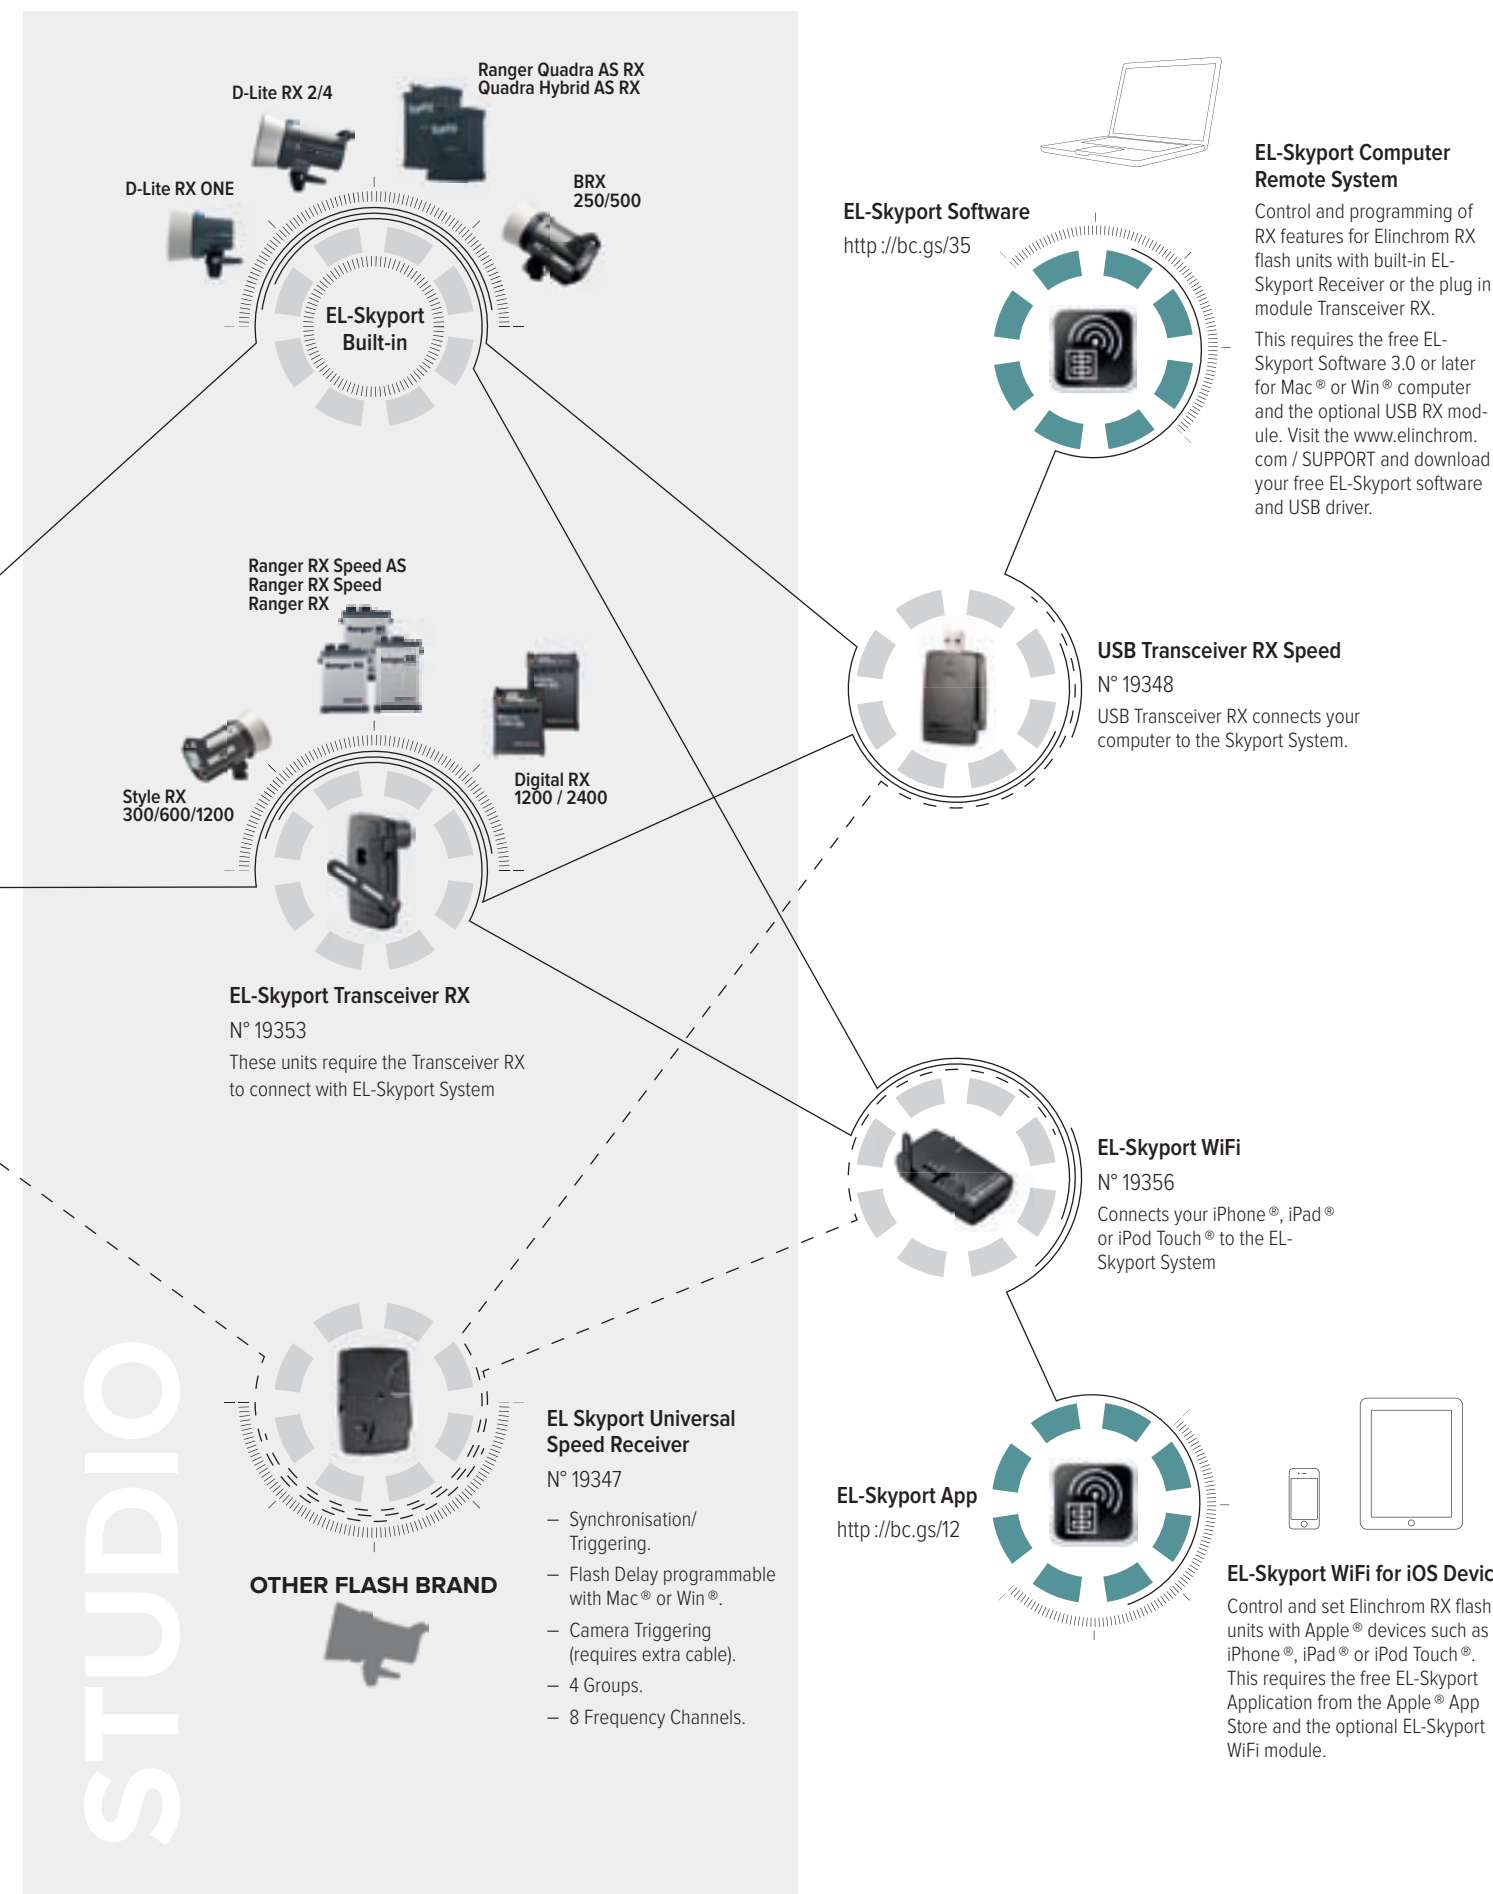

EL-SKYPORT TRANSMITTER SPEED

The ELS Transmitter Speed enables the triggering of units attached via a Universal Skyport module, all units with built-in Skyport and all Elinchrom units to which a Transceiver RX is attached.


The additional control of power settings and modelling lamp on/off can be achieved on all Elinchrom units with built-in Skyport RX (D-Lite RX One, D-Lite RX 2/4, BRX 250/500 and Ranger Quadra Hybrid) and on all Elinchrom units, which require the Transceiver RX (Digital RX 1200/2400, Ranger RX/Speed/Speed AS and Style RX 300/600/1200).



EL-Skyport Transmitter Speed
N° 19350

FEATURES

- +/- buttons to change flash power settings and modelling lamp on/off.
- Test button for manual flash trigger.
- Switch selection for 8 different Frequency Channels.
- Switch selection for 4 different Groups.
- All switch to control all units of Group 1 to 4.
- LED status for sync mode and battery level status.
- Long life Lithium battery to provide over 30000 flashes.
- Integrated hot-shoe with screw lock.
- Super small. Only 4 x 5 cm.
- Ultra lightweight. Only 36 g including the battery!

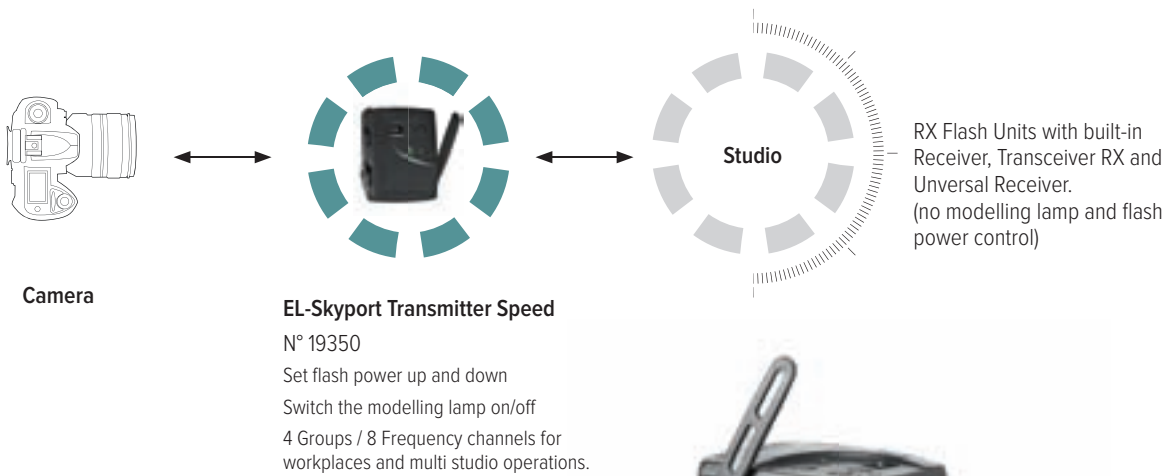

EL-SKYPORT UNIVERSAL SPEED RECEIVER

The Universal Speed Receiver is compatible with Classic Elinchrom units, most speedlights and most of other flash brands. Allow yourself to keep using your studio flash units with your speedlights!

The Universal Speed Receiver includes several sync cables, adapters and a multivoltage charger with Euro, UK and USA mains adapter and EL-Standard sync cables and 3.5mm jack, to connect to other units.

The charger can be connected to the mains whilst the Universal Receiver is in use.



EL Skyport Universal Speed Receiver

N° 19347


EL-Skyport Universal Speed Receiver REPLACE

N° 19346

To purchase a ELS Universal Receiver REPLACE unit, a used Universal Receiver with a defective or end of life battery must be returned to the dealer. The defective Universal modules will then be recycled at Elinchrom to save the environment. The Universal Receiver REPLACE module does not include sync cables or charger.

FEATURES

- 30 hours of battery use.
- The Li-Ion battery rechargers in approx. 3 hours with the included charger. No need for extra batteries.
- Auto-Standby function when not used for 4 hours.
- Integrated intelligent quick-charge circuit to recover deeply discharged batteries.
- Switch selection for 8 different Frequency Channels.
- Switch selection for 4 different Groups.
- Camera Triggering. This feature requires optional shutter camera release cables.
- Recognition by the EL-Skyport software 3.0 for trigger and Flash-Delay settings.
- Super small. Only 6.5 cm x 5 cm.
- Ultra lightweight. Only 54 g including the battery!

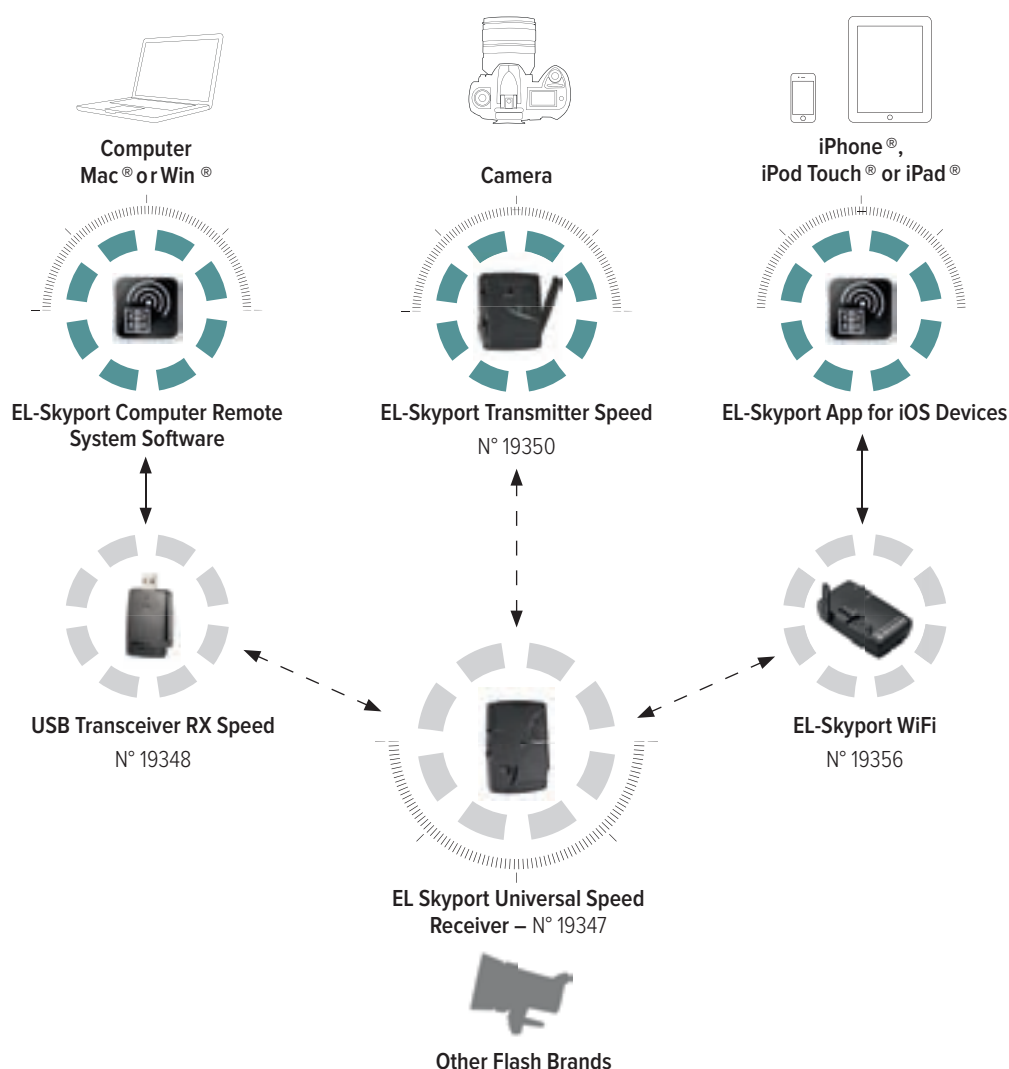

EL-SKYPORT TRANSCIVER RX

This module fits only to Elinchrom dedicated units such as the Digital RX series, the Ranger RX series and the Style RX series. No extra battery required for the Transceiver to be ready to use. For the Ranger RX series, the ELS Transceiver RX Adapter is required.

This module allows the control of power settings, modelling lamp on/off and flash synchronisation via the ELS-Transmitter. Basic features can also be controlled via Apple® devices with the optional WiFi module. Additional features such as Flash Delay and Flash Counter can be accessed with the EL-Skyport software 3.0.


The Speed mode function is also available for units, which require the Transceiver RX via the EL-Skyport software 3.0, available as a free download for MAC® and WIN® at www.elinchrom.com



**EL-Skyport
Transceiver RX**
N° 19353

FEATURES

- Switch selection for 8 different Frequency Channels.
- Switch selection for 4 different Groups.
- Recognition by the EL-Skyport software 3.0 and EL-Skyport Mobile App.

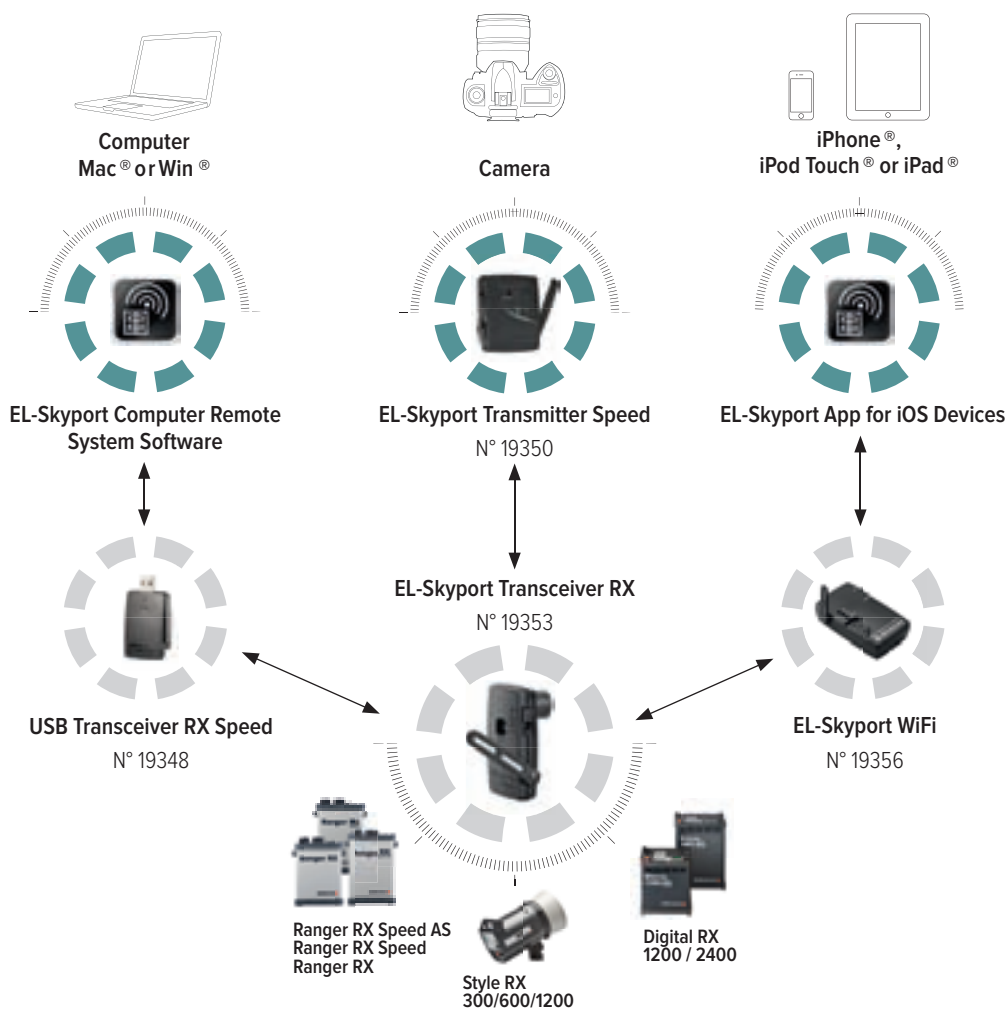

MOBILE APPLICATION FOR
APPLE® MOBILE DEVICES AND
EL-SKYPORT WIFI

Uniquely Elinchrom Skyport. This is the first wireless system which enables the remote control and the remote of Elinchrom RX flash units from Apple® mobile devices such as iPhone®, iPad® and iPod Touch®. The idea is to use devices for controlling flash units, which already exist in big volume in the market and which many owners consider to be the most practical and user friendly mobile devices ever. All Elinchrom RX units can be controlled but various features are accessible depending on the unit detected.

The Skyport WiFi module is the bridge between Apple® devices and Elinchrom flashes. This module can also act as a Universal Speed Receiver at the same time.



EL-Skyport WiFi
N° 19356

FEATURES

- Control features with an Apple® device.
- Frequency and Group settings are adjustable on the application.
- Shares the same technical specification as the Universal module. See page 29.
- Up to 50 m outdoor in Wifi mode and up to a 100 m in Skyport mode.
- Up to 20 m indoor in Wifi mode and up to 40 m in Skyport mode.
- Wireless firmware update via the EL-Skyport software 3.0.





iOS App
Compatible



EL-Skyport App



Please download
the iPhone® App
from the App
Store®
<http://bc.gs/12>

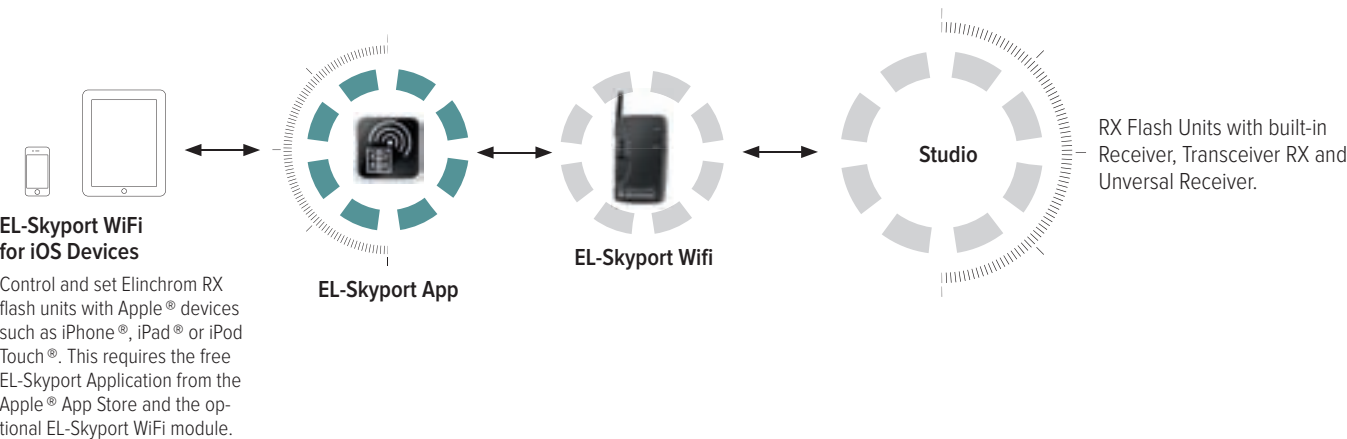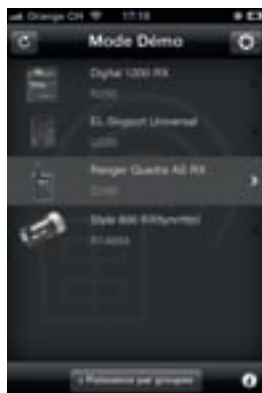

EL-SKYPORT STUDIO MANAGEMENT SOFTWARE

Managing one's studio can get tricky when many lights are involved. The Elinchrom Skyport Software 3.0 provides the perfect solution. The latest release of the EL-Skyport Software has been developed to help photographers with their workflow.

Available as a free download from our website, the EL-Skyport 3.0 allows photographers the ability to control all of their Elinchrom RX lighting equipment directly from their MAC® or WIN® operating systems.

An additional feature of this software is the Photo-Job function. Photo-Job is basically a Studio where EL-Flash units, accessories and all settings can be simulated. These setups can be then saved and shared to other photographers using the EL Skyport Software 3.0. An excellent way for students or anyone who wants to learn more about photography to share their experience on photography forums.



EL-Skyport Studio Management Software

Get the software <http://bc.gs/35>



FEATURES

- Control of functions of all Elinchrom RX units.
- Firmware update.
- Programmable Timer.
- ON/OFF Flash Counter.
- Photo Job Studio management.


USB Transceiver RX Speed

N° 19348

The USB Transceiver RX modules fit any MAC® or WIN® computer.

By installing the EL-Skyport Software 3.0 all Elinchrom RX units can be controlled. The program will automatically search for units with Transceiver RX modules or with built-in Skyport RX receivers. The Universal module can also be detected but only offers synchronisation and strobing option.

The latest EL-Skyport software can be downloaded for free in our Support section at www.elinchrom.com

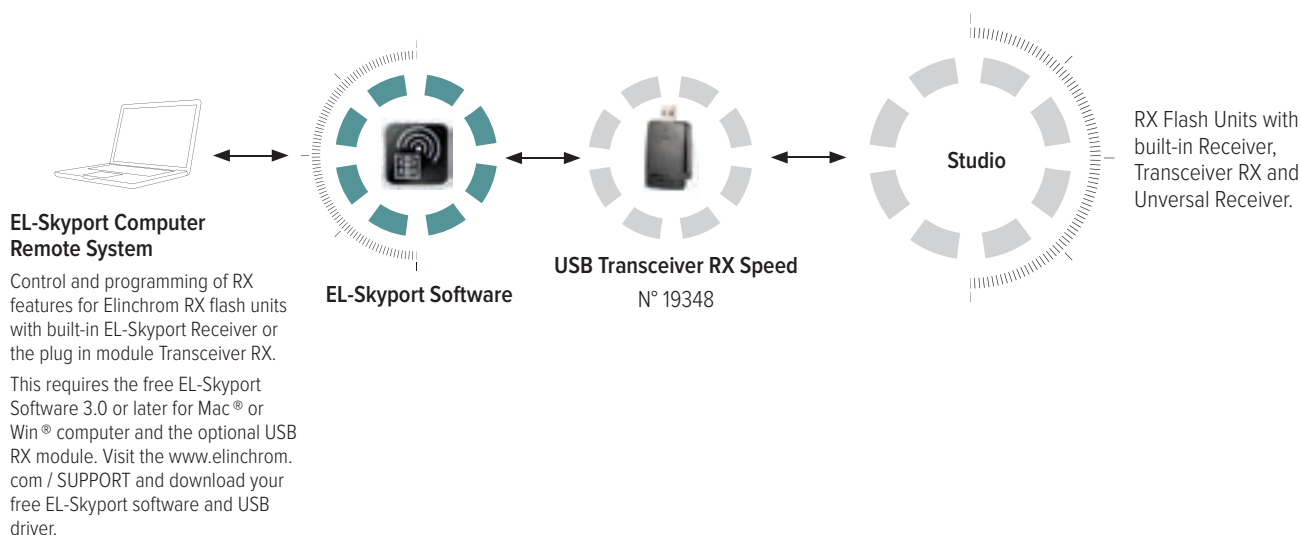



EL-SKYPORT UNIVERSAL SPEED TRIGGER SET

N° 19357

For classic Elinchrom flash units and other flash brands.

Qty	N°	Article
1x	19350	Transmitter Speed, incl. battery
1x	19346	Universal Receiver Speed
1x	19355	Multivoltage Charger with Euro, UK and USA mains adapter
1x	11120	Sync cable 20 cm, 2.5 mm jack – camera pc
1x	11122	Sync cable 40 cm, 3.5 mm - 3.5 mm Jack
1x	11123	Sync cable 40 cm, 3.5 mm jack - EL Standard Sync socket
1x	11126	Sync Adapter 3.5 - PC female
1x	11125	Sync Adapter 6.2 - 3.5 jack



EL-SKYPORT RX TRIGGER SET

N° 19358

Only for Style RX, Digital RX and Ranger RX battery units.

Qty	N°	Article
1x	19350	Transmitter Speed, incl. battery
2x	19353	Transceiver RX
1x	11120	Sync cable 20 cm, 2.5 mm jack - camera pc



EL-Skyport Computer Remote & Trigger Set

N° 19359

Only for Style RX, Digital RX and Ranger RX battery units.

Qty	N°	Article
1x	19350	Transmitter Speed, incl. battery
2x	19353	Transceiver RX
1x	19348	USB Transceiver RX
1x	11120	Sync cable 20 cm, 2.5mm Jack / Camera X-socket
1x	11121	USB extension cable

The latest EL-Skyport Software for MAC® or WIN® operating systems is required, which is available as a free download at www.elinchrom.com. The Ranger RX requires the ELS Transceiver RX Adapter 19374, which is part of every Ranger RX unit.

For further details, upgrades, news, the latest information about the EL-Skyport system and «how to do», please visit frequently the Elinchrom website. In the Support area the latest user guides and technical specifications can be downloaded. Technical data, features and functions of Elinchrom flash units and the EL-Skyport system may change without advise. No guarantee for misprints.

CONTINUOUS LIGHT



SCANLITE HALOGEN 300 – 650 W

The Halogen Scanlites are an excellent choice for low cost digital photography, video and many other imaging requirements.

Often the choice of accessories to personalize the quality of continuous lighting is limited whereas with the Scanlite Halogen, most accessories are available and the Zoom function enables endless possibilities for your lighting! To cool down the whole system, the fan’s speed is electronically temperature controlled and very silent.

FEATURES

- Zoom function allowing more lighting options.
- Can be used either with a 300 W or a 650 W halogen lamp.
- Included Transparent glass dome for protection.
- Intelligent low noise fan : The electronically controlled fan spins slower or faster depending on the internal temperature of the Scanlite.
- Multivoltage : The Scanlite can be used with 110 V or 230 V. The correct configuration of Halogen lamps and fuse must be applied.
- Small, robust and lightweight housing with large rubberised handle.
- Extra umbrella fitting for other umbrella shaft sizes.
- All Elinchrom reflectors, umbrellas and softboxes (except Portalite softboxes) can be used up to 300 W.
- All Elinchrom metal reflectors can be used up to 650 W (except Snoot reflector, reflectors with grids and fibre optic systems).



SCANLITE Halogen 300 - 650 W
N° 20998



Glass Dome Transparent — N° 24918
Included standard glass dome for the SCANLITE Halogen (zoom version).



Glass Dome Frosted — N° 24919
The frosted glass dome will soften shadows of edges and offer a wider even light distribution and protects the halogen lamp.

SCANLITE HALOGEN SET 2 — N° 20656

Qty	N°	Article
2x	20998	SCANLITE Halogen 300 - 650 W
2x	23022	Halogen Lamp 300 W / 230 V
2x	23005	Halogen Lamp 650 W / 230 V
2x	24918	Glass Dome - Transparent
2x	26143	Umbrella Wide Reflector 90° 16 cm
1x	33209	Elinchrom Carrying Case - Compacts

Note : Fuses and halogen lamps must correspond to the correct voltages and halogen lamps!

Optional Tripod Sets are available. See page 50.



SCANLITE HALOGEN SET 3 — N° 20659

Qty	N°	Article
3x	20998	SCANLITE Halogen 300 W - 650 W
3x	23022	Halogen Lamp 300 W / 230 V
3x	23005	Halogen Lamp 650 W / 230 V
3x	24918	Glass Dome - Transparent
3x	26143	Umbrella Wide Reflector 90° 16 cm
1x	33209	Elinchrom Carrying Case - Compacts

Note : Fuses and halogen lamps must correspond to the correct voltages and halogen lamps!



A woman with blonde hair, wearing a white blazer over a white shirt and dark trousers, stands in a grassy field. She is holding a long, flowing red scarf with both arms raised. The background shows a line of trees under a clear blue sky. The text "ACCES-SORTES" is overlaid in the center.


ACCES- SORTES



ROTALUX

The easy mounting Rotalux system is probably the most widely copied of all softbox systems. However, it is easier to copy a design than a quality and the Rotalux softboxes remain the best in their class. They are lightweight and unlike many other softboxes, fold down just like an umbrella and can be easily stored in the included carrying bag.

The quality of light is outstanding because of their construction and the internal diffuser provides the softest and most even light possible. The optional deflector set takes advantage of the unique Elinchrom central shaft to modify the softness / hardness and colour like no other softbox system. Rotalux adapter rings are now also available for other brands of flash.

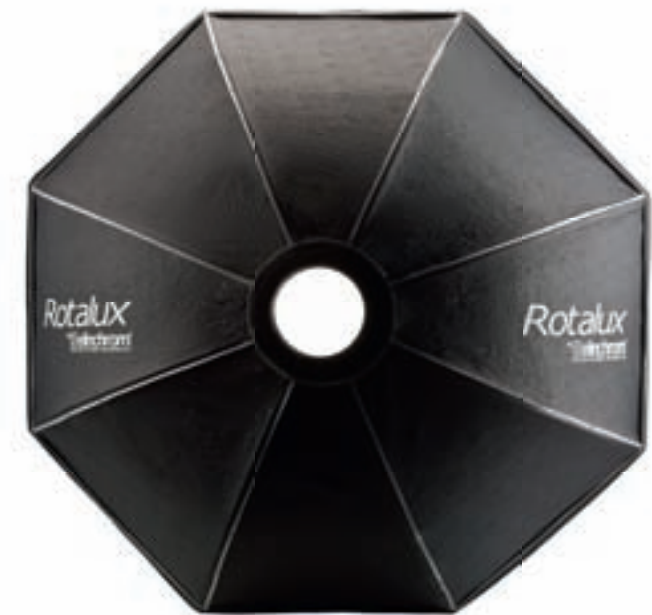

ROTALUX SOFTBOX

EVERY SOFTBOXES COMES WITH:

- Reflective Fabric
- External Diffuser
- Internal Diffuser
- Elinchrom Speed Ring
- Rods
- Carrying Bag
- Translucent deflector



360° rotating system for all Rotalux softboxes

Rotalux Adapter Rings

Elinchrom users aren't the only ones who can take advantage from the best softbox system. There are now optional adapter speedrings for other brands of studio flash. Only one adapter ring is required for any shape and size of Rotalux.



Deflector Set (gold, translucent, silver, frost) — N° 26310

Elinchrom is the only flash system with the central umbrella fitting, which is essential when Reflectors or Rotalux softboxes are used with Deflector Sets. These accessories can eliminate, soften or tone sharp shadow edges. The set contains four different deflectors; gold, silver, frost and translucent, each of 14 cm diameter.

N°	Brand
26530	Bowens
26531	Profoto
26532	Broncolor / Pulso
26533	Hensel / Expert EH
26534	Alien Bee / Balcar
26535	Comet
26536	Photona

SQUARE

Rotalux square softboxes are good for head and shoulder portraits, products or for use in smaller spaces. The catchlight can be similar to windows.



1. **Rotalux 70 x 70 cm** — N° 26178
Depth: 32 cm — Weight: 1.07 kg
2. **Hooded Diffuser 70 x 70 cm** — N° 26322
3. **RotaGrid 70 x 70 cm** — N° 26117
4. **Rotalux 100 x 100 cm** — N° 26179
Depth: 42 cm — Weight: 1.42 kg
5. **Hooded Diffuser 100 x 100 cm** — N° 26323

STRIP

Rotalux strip softboxes are great for product photography, especially bottles and other round reflectives items. They can also be used for $\frac{3}{4}$ length portraits and also widely used to light backgrounds where the length helps avoid fall-off from top to bottom.



1. **Rotalux 35 x 90 cm** — N° 26180
Depth: 25 cm — Weight: 0.97 kg
2. **Hooded Diffuser 35 x 90 cm** — N° 26324
3. **Strip Diffuser 15 x 90 cm** — N° 26268
4. **Rotalux 50 x 130 cm** — N° 26181
Depth: 42 cm — Weight: 1.45 kg
5. **Hooded Diffuser 50 x 130 cm** — N° 26325
6. **Strip Diffuser 25 x 130 cm** — N° 26270
7. **Strip Diffuser 15 x 130 cm** — N° 26269

RECTANGULAR


Rotalux recta softboxes are useful for general purpose photography like portraits and product photography. Because of their shape and size, they provide flexibility in placement.



1. **Rotalux 60 x 80 cm** — N° 26175
Depth: 30 cm — Weight: 1.30 kg
2. **Hooded Diffuser 60 x 80 cm** — N° 26318
3. **RotaGrid 60 x 80 cm** — N° 26110
4. **Rotalux 90 x 110 cm** — N° 26176
Depth: 42 cm — Weight: 1.55 kg
5. **Hooded Diffuser 90 x 110 cm** — N° 26319
6. **RotaGrid 90 x 110 cm** — N° 26111


OCTOGONAL

Rotalux octa softboxes are very popular among beauty and fashion photographers, as they prefer the round catchlight given by these softboxes. You can make yourself a great folding beauty dish just by removing the front and inner diffusers and adding one of the optional deflectors.

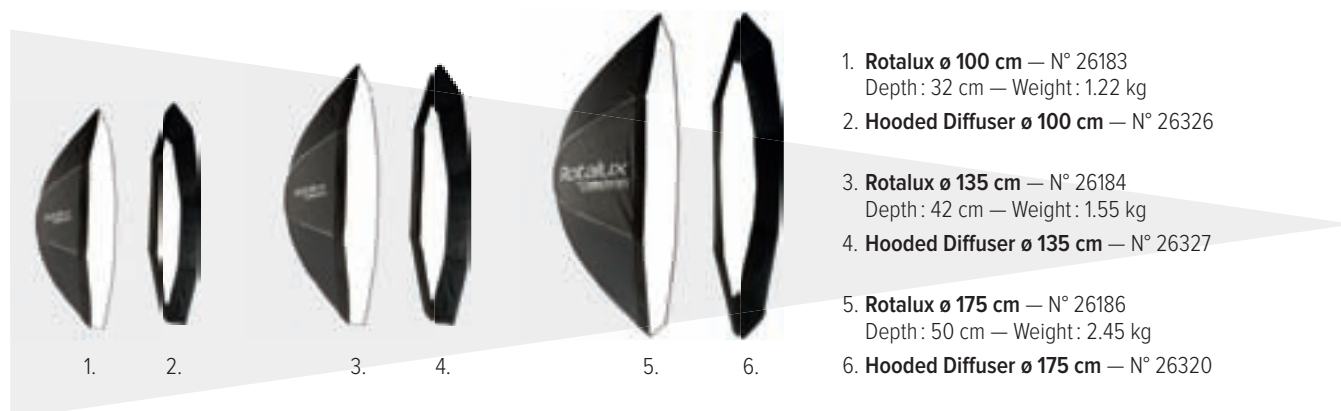

DEEP OCTOGONAL

Rotalux deep octa softboxes have become the most popular shape among Rotalux users. The narrow shaped Deep Octa reduces the spread of light and offers sharper shadows compared to standard sized octagonal softboxes. They provide a very even diffuse light over the front screen and are an excellent crispy and direct light when used without diffusers to give a beauty dish look.

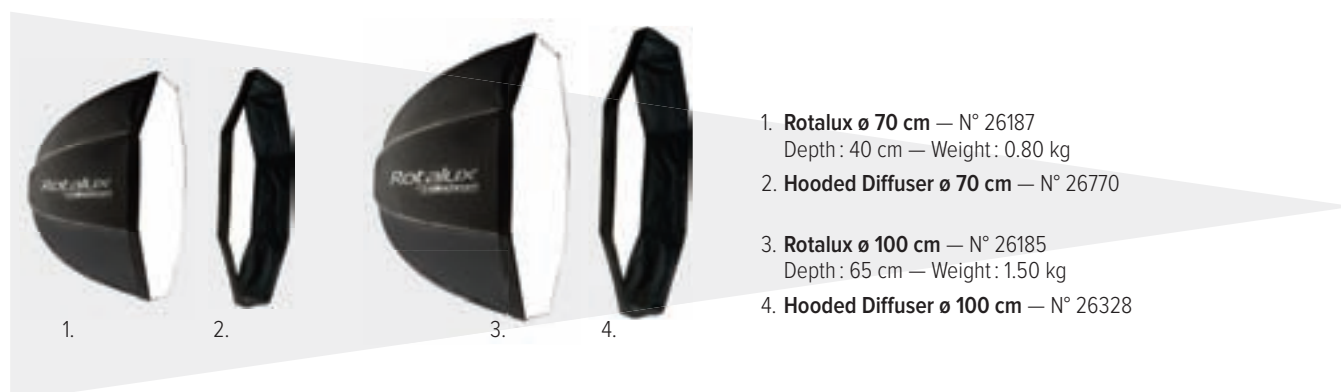

PORTALITE

The Portalite softbox is an entry-level softbox system with great light performance, which fits to all Elinchrom flash units since 1974. Portalites are made out of the same quality material as Elinchrom uses for Rotalux but priced to budget.

The EL speed ring and rods are designed to give good stability and quick assembly. Instead of using third party accessories, which may not fit to required specifications, Portalite is a professional and low price alternative, an ideal car boot softbox for indoor or outdoor use.

The Portalite series is available in square shape in 40 x 40 cm and 66 x 66 cm. There is also a new 56 cm Octa shape designed to work as a small beauty dish when used with the optional deflector set.



SPOT ON AT ELINCHROM

The Elinchrom Fresnel and Projection spot line covers all professional needs for sophisticated lighting in portrait and commercial photography. High quality projection lenses allow precise and crisp illumination. Usable with any ventilated Elinchrom head.



Zoom Spot 18°- 36°
N° 26481

The Zoom Spot has high quality lenses for size and sharpness control, completed with four integral masking blades. Different type of accessories can be fitted and to simplify maintenance, the lenses are easily accessible for cleaning.



Zoom Spot Accessory Set
N° 26484

Gobo holder, 10 gobos, 2 front masks, filter holder, set of 10 as-sorted filters. The ultimate Zoom accessory Set.



Minispot - Accessory Type
N° 26420

A basic hard-edged spot, supplied complete with gobo/filter holder and one set of gobo's, various shapes and spots.

Incl. listed accessories:

- Set of 5 gobos ø 52.5mm — N° 26418
- Filter holder — N° 26422
- Lens — N° 26423

FIBRE OPTIC KIT

The captor holds up to three cables, each one metre long and 10 mm diameter for maximum light transmission. Correctly colour balanced, they are indispensable for most small object-photography whilst they dynamise larger subjects by highlighting or throwing long isolated shadows. Usable with any ventilated Elinchrom head.

Fibre Optic Kit 1 — N° 26431

Kit with one glass fibre cable

Incl. case and listed accessories:

- Fibre cable adapter — N° 26433
- Accessory/filter-holder — N° 26434
- Focussing tube — N° 26435
- Lens hood — N° 26436
- Adapter f. duct extension — N° 26437
- Set of 10 filters — N° 26438
- Quick coupling device — N° 31150
- Metal base plate — N° 31153
- Articulated arm — N° 31161
- Fibre duct holder — N° 31162
- Mini holder for accessories — N° 31163
- Carrying base — N° 33208
- Fibre duct — N° 50163

Fibre Optic Kit 2 — N° 26430

Kit with two glass fibre cables

Additional to Kit 1:

- Accessory/filter holder — N° 26434
- Focussing tube — N° 26435
- Lens hood — N° 26436
- Articulated arm — N° 31161
- Fibre cable holder — N° 31162
- Fibre duct — N° 50163



Invented in 1982, their unique patented construction and design have won these large lightweight softboxes worldwide popularity. A lightweight die cast rigid central mounting for the flash head inside the unit, which places the flashtube at the point of focus. The optical result is a light source, which is so even at the diffuser surface, that many famous photographers use the Octa as a single light source for portrait photography. In the U.S.A. it is often referred to as "The Beauty Light". This exceptional softness of the light has sold many thousands of units, adapted to other flash systems which do not have equivalent light sources.

FEATURES

- Super fast to set up, with the unique EL folding construction.
- 360° rotating system.
- All indirect light banks are supplied with a carrying bag.
- Accepts all Elinchrom units, including the Ranger Quadra heads with the EL reflector adapter.
- Best quality of light.



EL-Octa 190 cm

N° 26158

Includes diffuser and carrying bag. Does not include flash head and tripod.



EL-Strip
33 x 175 cm

N° 26160

Includes diffuser and carrying bag. Does not include flash head and tripod.

EL-Square 145 x 145 cm

N° 26156

Includes diffuser and carrying bag. Does not include flash head and tripod.

EL-Recta 72 x 175 cm

N° 26154

Includes diffuser and carrying bag. Does not include flash head and tripod.

ROTALUX DEEP INDIRECT

Based on the Rotalux softbox design, the Rotalux Deep Indirect softbox offers a superb crispy light and can be modified to a softer light with shadows by using the included diffusers. Just like other Rotalux softboxes, the unit folds down like an umbrella, is easily transportable and can be mounted as a direct softbox with the included Rotalux ring.

FEATURES

- Diameter 150 cm / 73 cm depth and 96 cm with tilt head and handle.
- 360° revolving system with screw locking.
- Delivered set up as an indirect.
- Included additional EL adapter ring to fit flash units for direct lighting.
- Included carrying bag for easy transportation or storage.
- Requires the EL-Tripod 31043 or heavier.
- Optional Hooded Diffuser is available.

Rotalux Deep Indirect 150 cm

N° 26188

Includes internal and external diffuser, Elinchrom Rotalux speedring, translucent deflector and carrying bag.

Hooded Diffuser (optional)

N° 26771

Limits the spread of light for a more directed light control.



Elinchrom offer a wide range of superbly designed reflectors, compatible with the entire Elinchrom studio flash system. Each reflector is specially designed to do a different job. Decide how you want your lighting to look like and there will be a reflector with precisely the right profile. The Elinchrom reflectors are made to the best specifications possible to insure endless lighting possibilities!

Standard Reflector 21 cm 50°

N° 26141

The Standard Reflector combines a high output with a good spread of light. The internal recess allows to push in high efficiency grids.



Reflector Grid Set 21 Basic

N° 26049


Reflector 21 cm 50° — N° 26141
30° Grid — N° 26052
20° Grid — N° 26053



Barndoor Set 21

N° 26037

Light shaper carrier — N° 26034
2x Barndoors 26x16 cm — N° 26006
2x Barndoors 21x15 cm — N° 26009



Compact Reflector 21 cm 65°

N° 26140

A medium, to wide-angle reflector, well suited for colour gelling large areas.



Reflector Grid Set 21 Complete

N° 26051

Reflector 21 cm 50° — N° 26141
30° Grid — N° 26052
20° Grid — N° 26053
12° Grid — N° 26054
8° Grid — N° 26055



Barndoor Set Pro 21

N° 26039

Light shaper carrier — N° 26034
Including Trapezium, various sizes:
2x Barndoors 26x16 cm — N° 26006
2x Barndoors 21x15 cm — N° 26009
4x Barndoors 20 x 15 cm — N° 26005

Grid Reflector Set 18 Complete

N° 26135

Reflector 18 cm 65° — N° 26144
30° Grid — N° 26100
20° Grid — N° 26101
12° Grid — N° 26102
Gel holder Grid — N° 26132



Grid Reflector 18 cm 60°

N° 26144

A general purpose reflector for travelling. The internal recess allows to push in high efficiency grids.



Background Reflector

N° 26165

Delivers an oval pool of evenly distributed light for background and still life. 360° rotation. 32 x 21 cm.



Wide Reflector 16 cm 90°

N° 26143

Gives a wide even coverage, excellent for copy work, single source or groups.



Snoot

N° 26061

A traditional accessory, designed to give an approx. 15° controlled spot of light, with a hard shadow effect. Includes one Snoot Grid.



Snoot Grid Set 3

N° 26427

Grids of various honeycomb sizes deliver a sharply defined concentrated light source of exceptional quality. The grid is an easy retro fit, with clips to grip the interior of the snoot.

The Grid necessarily restricts ventilation of the Snoot. Please monitor heat level at all times. High wattage tungsten lamps or high power multi-flashing are liable to cause overheating.





High Performance Reflector 26 cm 48°

N° 26137

A bright, high performance reflector, ideal for general sports applications.



Maxi-Lite Reflector 40 cm 43°

N° 26147


Ideal for sunlight effects through windows; creates hard and brilliant highlights.



Maxi-Spot Reflector 40 cm 29°

N° 26149

Same shape as the Maxi Lite Reflector but produced with brilliant/glossy reflection material for very high efficiency, throwing light even over longer distances. A narrow powerful beam, which creates deep and sharp, shadows.

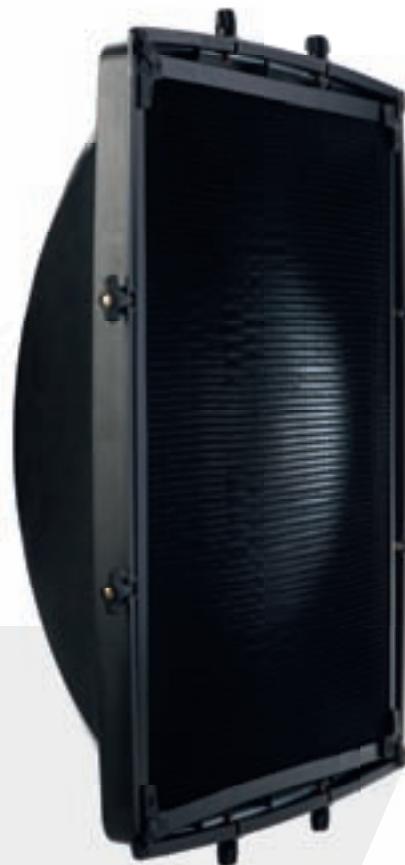

Square Reflector Set 44 — N° 26048

This is a multifunctional reflector. Without Grid, it is a soft wide angle reflector. Put the Honeycomb Grid in place and you are left with a soft pool of light ideal for all types of portraiture and small still life subjects. Includes the Grid.

Square Reflector 44 cm — N° 26163
Square Reflector Grid 44 cm — N° 26057



Protective Cap

N° 26124

To protect modelling lamp and flashtube for all heads and compacts.



Bayonet Reflector Support Set

N° 22061

This useful set of four bayonet adapter rings accepts all Elinchrom reflectors since 1974. Reflector and Rotalux softboxes can be safely stored when mounted on a free studio wall.



Varistar Reflector 24 cm 90°

N° 26164

Wide coverage with central hotspot. Best use with Varistar umbrella.

SOFTLITES REFLECTORS

Beauty dishes, slightly harder lighting than a softbox giving better definition of facial features, are perfect for close in beauty and portrait work. The included Deflector Set can modify the colour and softness. The light can be further softened with the optional showercap diffuser.

Softlite White Reflector
70 cm 82° — N° 26169

Incl. Deflector Set 26310.



Softlite Grid 70 cm

N° 26023

Grids give the possibility to control precisely the direction and spread of light while offering sharper shadows.



Softlite Silver Reflector
44 cm 55° — N° 26166

Incl. Deflector Set 26310.



Softlite White Reflector
44 cm 80° — N° 26168

Incl. Deflector Set 26310.



Softlite Silver Reflector
70 cm 64° — N° 26167


Incl. Deflector Set 26310.



Barndoor 44x35cm

N° 26010

Offers unequalled opportunities of light control. Works perfectly with the Softlite Grids 44 cm, 70 cm and Square Reflector 44 cm.



Softlite Grid 44 cm

N° 26021

Grids give the possibility to control precisely the direction and spread of light while offering sharper shadows.



Diffuser Tissue
70 cm

N° 26235



Diffuser Tissue 44 cm

N° 26232



DEFLECTORS

Elinchrom is the only system with the central umbrella fitting which gives photographers the freedom to modify the hardness / softness of their lights easily. These deflectors can eliminate, soften or tone sharp shadow edges. Very efficient with Rotalux softboxes.



Translucent Deflector 14 cm

N° 26305

This deflector helps to even the hotspot of any accessory.

Deflector Set

N° 26310

The Deflector Set includes one deflector of each : Silver, gold, translucent, frost and 2x Deflector Rods.



FILTERS

DIFFUSING FILTERS

Add extra softness. The diffusers are available in three sizes. Manufactured from spun glass material to provide resistance to heat.

Diffusing Filters 21 cm

N° 26249

Set of ten filters, to fit the 21 cm Accessory Holder 26034.



POLARIZING FILTERS

The rotating facility of the Accessory Holder means that Elinchrom units can be successfully polarized to help control reflections and unwanted highlights. Polarizing filters absorb heat so reduce modelling lamp power whenever possible.

Polarizing Filter 21cm — N° 26244

One filter to fit the 21 Accessory Holder 26034.

Colour Gels 21 cm — N° 26243

Colour Gels 21 cm : Set of 10 assorted gels in basic colours. They can be fitted on the 21 cm 26034 to bring vivid colour to any photography.

Colour Gels 21 cm — N° 26255

Set of 10 assorted gels in grey colours and diffusion filters.

Colour Gels 21 cm — N° 26256

Set of 20 assorted gels in a large panel of colours.

Note : green, blue and purple all absorb heat rapidly and may melt.

VARISTAR 85 & 105 CM

The multitalented umbrella for in and out studio use: Easy to set up, lightweight and fits into most Elinchrom carrying bags. Ideal for industrial, portraits and groups, the Varistar is even in light distribution due to its central positioning over reflector and flashtube. The umbrella comes with a protective bag and the Varistar Set includes one 26164 Varistar Reflector 24 cm.

Varistar Umbrella 85 cm

N°26383

Incl. protection bag.

Varistar Umbrella 105 cm

N°26384

Incl. protection bag.

Varistar Set 85

N°26386

Includes: Varistar 85 cm, protection bag, and Varistar Reflector 24 cm.

Varistar Set 105

N°26385

Includes: Varistar 105 cm, protection bag and Varistar Reflector 24 cm.




UMBRELLAS

With Elinchrom's unique central shaft, umbrellas get one of the best symmetry light output of all flash systems. All EL-umbrellas are made with non-fluorescent UV material.

ECO UMBRELLAS

ECO Umbrella Silver 85 cm

N°26350

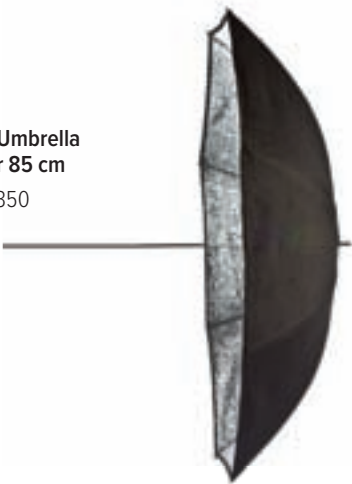

ECO Umbrella Translucent 85 cm


N°26351



ECO Umbrella Set

N°26062

Includes 1x 26351, 1x 26350

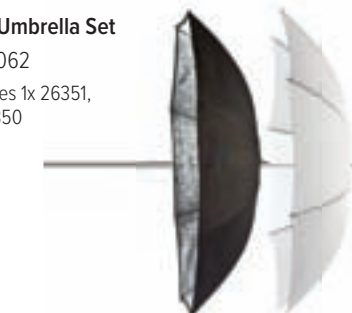

PROFESSIONAL UMBRELLAS

Pro Umbrella
White 85 cm
N°26372



Pro Umbrella
Translucent 85 cm
N°26371




Pro Umbrella
White 105 cm
N°26375



Pro Umbrella
Translucent 105 cm
N°26374



Pro Umbrella
Silver 105 cm
N°26361

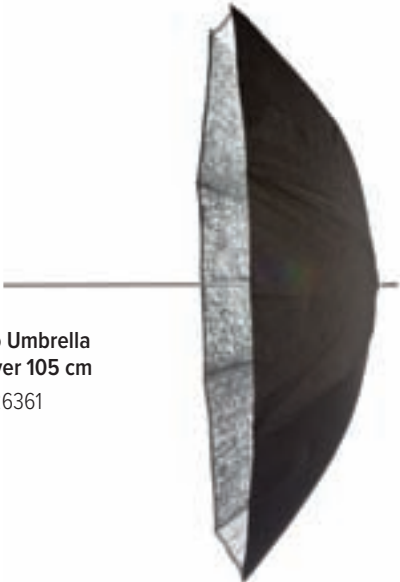

EL-Daylight Blue 105 cm — N°26380
Converts Tungsten-Halogen light 3200° into
Daylight 5500° Kelvin



EL-Boom Arm 63 – 156 cm

N° 31049

The EL-Boom Arm with rubberised handgrip extends head / hair lights up to 156 cm. This is a comfortable way to hold up lighting gear over the subject. The profiled extension tube avoids heads, reflectors spinning around even when used with a softbox. The two sections of the EL-Boom Arm can be quickly adjusted with the clip-locks.

- Min. size : two sections, 63 cm
- Max. extension 156 cm
- Weight : 0.44 kg
- Rubberised handgrip
- Profiled aluminium tubes
- Standard spigot for EL-Flash heads and the Ranger Quadra heads.



Vacuum Grip — N° 22900

The Vacuum Grip allows you to fix Elinchrom Heads and accessories on glossy surfaces. Very useful when taking images in small spaces.

- Maximum load : up to 2,5 kg
- Bracket length : 15 cm with 16 mm Spigot
- Grip surface in diameter : 12 cm
- Length over all : 18,3 cm



Polystand

N° 31045

With the Polystand's unique sliding column and adjustable permanent mounted boom, a head or accessory can be placed up to 335 cm or as low as 5 cm from floor level. Folds flat for travelling.


- Folded min. size : two sections, 150 cm
- Max. height : 335 cm
- Weight : 5.5 kg
- Max load : 8 kg/Boom 3kg
- Dimensions : 150 x 33 x 21 cm
- Boom : 154 cm



Studio Stand

N° 30151

Sliding arm studio stand with braked wheels. It features a very low minimum head position (15 to 250 cm) and accepts additional sliding arms.

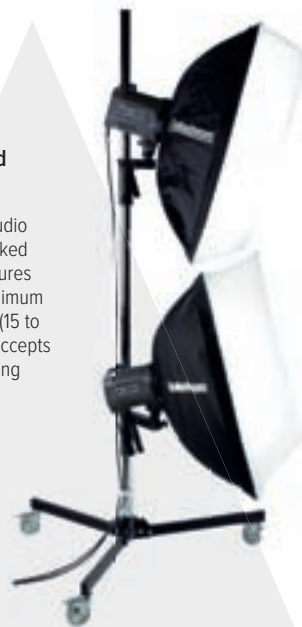

EL-TRIPODS SPECIFICATIONS

	Polystand	EL-Tripod Air 102-265cm	EL-Tripod 88-235cm	EL-Tripod 52-190cm	EL-Boom Arm 63-156cm
Code	31045	31043	30101	31048	31049
Folded size min.	150 cm	102 cm	88 cm	52 cm	63 cm
Extention max.	335 cm	265 cm	235 cm	190 cm	156 cm
Extras	-	Air Cushioned	-	-	-
Boom	154 cm	-	-	-	156 cm
Load max.	8 kg/Boom 3kg	9.5 kg	4.5 kg	1.8 kg	2 kg
Diameter	33 x 21 cm	9.5 cm	8 cm	7.5 cm	3 cm
Weight	5.5 kg	2.09 kg	1.72 kg	1.19 kg	0.44 kg



Tripod 52–190 cm — N° 31048

The new compact, aluminium lightweight stand is designed for small heads, e.g. the Quadra heads. With only 1.19 kg and 52 cm folded size, this stand is ultra transportable. The EL-Stand Set includes one carrying bag with shoulder strap and two stands. The perfect add on for our Quadra Sets.

Tripod Set 52-190 cm — N° 31050

2x Tripods 52 - 190 cm 31048, 1x EL-Carrying bag

Tripod 88 – 235 cm — N° 30101

The EL stand/umbrella sets are dedicated to the Elinchrom flash sets and can be ordered separately. The configurations are covering 2 and 3-headed sets.

Tripod Set 2 — N° 30162

2x Tripod 88–235 cm — N° 30101
1x EL-Carrying bag — N° 33230



Tripod Air 102-264 cm

N° 31043
(Air cushioned)

Tripod Air Set 102-264 cm

N° 31051
(Air cushioned) 2x Tripod 102-264 cm,
1x EL-Carrying bag — N° 33222



Tripod Set 3

N° 30161

3x Tripod 88–235 cm — N° 30101,
1x EL-Carrying bag — N° 33220

EL-CARRYING BAGS

For tripods & umbrellas 68 cm — N° 33218

For 3x tripods & umbrellas up to 87 cm — N° 33220

For 2x tripods up to 87 cm — N° 33230

For 3x stands & umbrellas up to 110 cm — N° 33222

For Indirect Lights ; Octa, Quadra, Recta & Strip — N° 33221

For Rotalux 26178, 26180, 26183, 26175 — N° 33226

For Rotalux 26179, 26181, 26184, 26176 — N° 33227

For Rotalux 26186 — N° 33228

For Rotalux 26188 — N° 33229



Tripod - Umbrella Set To Go

N° 20564

2x Tripod 88–235 cm — N° 30101,
1x Umbrella translucent 85 cm — N° 26351,
Umbrella silver 85 cm — N° 26350,
1x EL-Carrying bag — N° 33220



MANFROTTO TRIPODS AND ACCESSORIES

EL-code	Manfrotto	Article
14599	013	Adapter Spigot 1/4 + 3/8" male
30127.B	366b	First tripod 85-200 black
30129	017	Roller Set Deluxe for 30128.B, ø 19
30139.B	012b	Mini Tripod 9-85 cm, black
30149.B	004b	Master Tripod109-385 cm
30151	231	Sliding Support Stand complete
30152	231 Arm	Sliding Support Arm spare, only for 30151
31065.B	085bs	Light Boom Stand / boom in black
31070.B	025bs	Super Boom Stand / boom in black
31074	083Nw	Tripod 2 Wind-up + wheel set

El-code	Manfrotto	Article
31075	087Nw/104	Tripod 3 Wind-up + wheel set
31077	104	Wheel Set diam. 75 for 31074 + 31075
31151.B	154b	Triple lamp support black (lamp carrier)
31152	026Z	Umbrella Adapter
31158.B	098b	Telescopic Wall Boom
31159	143	Magic Arm Set
31164	035Z	Super Clamp
32058.B	032b	Autopole 2,1-3,7m, black
32059	045	Triple Hooks for background paper
32060	046	Expan Set, holds background paper
32061	272	Telescopic Background Support 3 sections

EL - SET CASES



EL - Compact Case — N° 33209

New modern look with ergonomic carrying handle and locking system. Carries and protects three compact flashes Style RX 300, 600, 1200 or Elinchrom flash heads. 63.5 x 46 x 20.5 cm, 4.75 kg

Pro Basic Set — N° 20767

Sync cord — N° 11075
Reflector 16 cm — N° 26143
Reflector 18 cm — N° 26144
Umbrella translucent 85 cm — N° 26371
Umbrella white 85 cm — N° 26372
EL-Compact Case — N° 33209
Carrying bag — N° 33220



EL - Power Pack Case N° 33215

For all Digital RX packs, all Ranger RX models and 1-2 flash heads.

EL-Tube Bag D-Lite RX One — N° 33194

Carry and protects two D-Lite RX One

EL-Tube Bag D-Lite RX — N° 33198

Carry and protects two D-Lite RX 2 / 4

EL-Tube Bag BRX — N° 33199

Carry and protects two BX-Ri 250 / 500



EL-Skyport Hard Shell Case N° 33000

EL - TABLES

The EL Multi -Table is a flexible creative tool for universal Table-Top shootings. The latest design is a robust, ultra stable aluminium profile construction and is very easy to setup. The EL Multi Table offers variable radius curves with a multi-angle, adjustable height-shooting surface. A secondary transparent shooting surface enables heavier objects to be photographed without the surface deforming. An optional, additional tray can be mounted for reflective or transmitted lighting effects.



EL Multi-Table Komplett N° 19228

Includes a Plexiglas plate white, matt / glossy 80 x 200 cm / 7.5 kg & transparent Plexiglas plate 80 x 100 cm / 11.5 kg



19228 + 19226

EL Multi-Table — N° 19227

without plexiglas plates.

EL Multi-Table additional tray — N° 19226

Including plexiglas plate transparent 80 x 100 cm for second shooting surface.

EL Multi-Table additional tray — N° 19225

Without plexiglas plate.

Plexiglas plate white — N° 26265

Matt/glossy 200 x 80 cm

Plexiglas plate transparent — N° 26267

80 x 100 cm

EL Notebook-Table — N° 22901

The Computer Table supports 13", 15" and 17" Laptops and is a useful studio accessory for digital imaging. The base is made of metal and includes the tilt-head, which fits to any standard tripod with 16 mm spigots. To ensure best possible stability and drop down security, the EL-Tripod 31043, or heavier is required.

Dimensions : width : 50 cm, depth : 28 cm
Weight including tilt-head 1.5 kg
Supports Laptops up to 40 cm x 27 cm / 3.5 kg





EL-Sync Cord 5m — N° 11088

Camera pc > 3.5 mm jack
EL units with 3.5 mm sync plug: Style, Style S, Style RX, FX, BX, Chic 1/2, Digital 1/2, Digital RX 1200/2400, D-Lite, BXRI and BRX.



EL-Sync Extension Cord 10m

N° 11080
EL-Amphenol female > male
To extend following sync cords: 11075, 11074, 11089, 11081, 11083, 11072.



Sync Cord Transmitter 20 cm

N° 11120
Camera pc > 2.5 jack
This cable connects the EL-Skyport Transmitter or the Prolinca IR-Transmitter with the camera PC socket.



EL-Sync Cord 2m — N° 11084

Camera pc > 3.5 mm jack
EL units with 3.5 mm sync plug: Style, Style S, Style RX, FX, BX, Chic 1/2, Digital 1/2, Digital RX 1200/2400, D-Lite, BXRI and BRX.



EL-External Photocell with clamp 5m

N° 11081
EL-Amphenol > photocell
A photocell mounted on a clamp with 5 m sync cable and standard EL-Amphenol plug for EL flash units, except Style FX, BX, D-Lite, BXRI and BRX. To be used when the master flash is too far or even hidden from the built-in photocell.



Sync Adapter 3.5-PC — N° 11126

The Sync Adapter 3.5 mm - PC (female) connects the EL-Skyport Universal Speed Receiver with any other PC (male) sync plug.



EL-Sync Cord 5m — N° 11075

Camera pc > EL-Amphenol
Elinchrom standard sync cord for all self-contained (compact) flash units and power packs. Except Style FX, BX, D-Lite, BXRI and BRX.



Sync Cord Transmitter 50 cm — N° 11071

Camera pc > 2.5 jack
To connect the EL-Skyport Transmitter, or the FRC Transmitter with the camera pc.



EL-Sync Adapter 6.35 phone jack 10 cm

N° 11083
EL Amphenol > 6.35 phone jack female
To connect sync cords with 6.35 phone jack. Except Style FX, BX, D-Lite, BXRI and BRX.



EL-Spiral Sync Cord 5m — N° 11074

Camera pc > EL-Amphenol
Gold plated contacts to increase the connectivity, with a flexible spiral section, for all EL compacts and power packs. Except Style FX, BX, D-Lite, BXRI and BRX.



Sync Adapter 6.2 - 3.5 J — N° 11125

Sync Adapter 6.2 - 3.5 j. This device converts 6.2 sync plugs to 3.5 mm standard sync sockets. The Sync Adapter is part of the EL-Skyport Universal Set 19360.



EL-FRC Sync Cable-Receiver 50 cm

N° 11072
EL-Amphenol male > 2.5 jack
This cable connects the FRC Receiver 19316 with the EL flash unit. Except Style FX, BX, D-Lite, BXRI and BRX.



EL-Sync Hardwire Cord 5 m — N° 11089

3.5 mm jack > EL-Amphenol
To hardwire units in case the photocell has a bad reception due to long distance between flash units. For all self-contained (compact) flash units and power packs. Except Style FX, BX, D-Lite, BXRI and BRX.



Sync Cord Transmitter 30 cm

N° 40203
Camera pc > 2.5 jack
This cable connects the EL-Skyport Transmitter or the Prolinca IR-Transmitter with the camera PC socket.

HalogenLampAdapter

N° 23101

Converts from E 27 to a GX 6.35 socket. For EL-Compacts: EL 250 / 500, Style Compacts, former Flash heads EL-S, EL-T and actual Mini S / A Heads. Note: Once the adapter is fitted use only with the following lamps: For Compacts 23034, for Flash heads 23022 or 23005.





POWER SPECIFI- CATIONS



STARTERS

ADVANCED

	D-LITE RX ONE	D-LITE RX 2	D-LITE RX 4	
Energy (Ws/J)	100	200	400	
F-Stop (1m, 100 ISO, reflector 48°)	32.4	45.3	64.3	
Power range f-stop	5	5		
Power range Ws	6 - 100	12 - 200	25 - 400	
Power range	1/1 – 1/16	1/1 - 1/16		
Power increments in f-stop	1/10 to programmable 5/10 - 1/1	1/10 to programmable 5/10 - 1/1		
Flash duration t0.5 at max. power in s.	1/2200	1/1200	1/800	
Recycling 230 V in s.	0.44 – 1.5	0.2 - 0.6	0.35 - 1.2	
Recycling 115 V in s.	0.45 – 2.1	0.2 - 0.8	0.35 - 1.6	
Colour temperature in °K at max. power	5500	5500		
Auto Power Dumping	Adjusts power settings automatically	Adjusts power settings automatically		
Power stability	± 0.5%	± 0.5%		
Voltage	Multivoltage 90 - 260 V	Multivoltage 90 - 260 V		
Modelling lamp mode	Proportional, min, max, off	Proportional, min, max, off		
Modelling lamp 230 V	E27 100 W / 196 V (effective 150 W)	E27 100 W / 196 V (effective 150 W)		
Modelling lamp 115 V	E27 100 W / 90 V (effective 150 W)	E27 100 W / 90 V (effective 150 W)		
Flashtube	n° 24009: Plug-in, user replaceable	n° 24009: Plug-in, user replaceable		
EL-Skyport (Built-in)	Integrated transceiver, 8 Frequency Channels and 4 Groups with full RX features	Integrated transceiver, 8 Frequency Channels and 4 Groups with full RX features		
Sync voltage	5 V (compatible with all cameras)	5 V (compatible with all cameras)		
Sync socket	3.5 mm Jack	3.5 mm Jack		
Fan Cooled	Microprocessor controlled fan with thermal cut-out	Microprocessor controlled fan with thermal cut-out		
Umbrella fitting	Centred tube for EL-umbrellas ø 7 mm. Stand bracket with extra umbrella fitting for larger umbrella shafts	Centred tube for EL-umbrellas ø 7 mm. Stand bracket with extra umbrella fitting for larger umbrella shafts		
Max. power consumption (230 V / 50 Hz)	140 W	150 W (during charge: 370 W)		
Max. power consumption (115 V / 60 Hz)	170 W	180 W (during charge: 280 W)		
Dimensions (with protective cap)	19 x 14 x 19 cm	26 x 14 x 19 cm		
Weight	0.9 kg	1.3 kg (2.8 lb.)	1.5 kg (3.3 lb.)	
Supplied with	Mains cable, sync cable, flashtube, modelling lamp and protective cap	Mains cable, sync cable, flashtube, modelling lamp and protective cap		
N°	20485.1	20486.1	20487.1	

COMPACTS

ENTRY PROFESSIONAL

PROFESSIONAL

	BRX 250	BRX 500	STYLE RX 300	STYLE RX 600	STYLE RX 1200
	250	500	300	600	1200
	45.8	64.8	64.1	90.1	128.1
	5		6		
	16 - 250	31 - 500	9-300	18-600	37-1200
	1/1 - 1/16		1/1 - 1/32		
	1/10 to programmable 5/10 - 1/1		1/10		–
	1/2762	1/1558	1/2850	1/2050	1/1450
	0.29 - 0.73	0.36 - 1.13	0.2 - 0.6	0.22 – 1.0	0.25 – 1.8
	0.27 – 1.02	0.34 - 1.45	0.25 - 0.8	0.3 – 1.5	0.4 – 2.9
	5500		5500		
	Adjusts power settings automatically		Adjusts power settings automatically		
	± 0.5%		± 0.5%		
	Multivoltage 90 - 260 V		230 V or 110 V version		
	On, proportional, off, free		On, proportional, off, free		
	E27 100 W / 196 V		E27 250 W / 230 V (effective 150 W)		300 W GX 6.35 – 230 V
	E27 100 W / 90 V (effective 150 W)		150 W – BA 15 D		250 W – BA 15 D
	n° 24000 : Plug-in, user replaceable		n° 24029 : Plug-in, user replaceable		n° 24068 : Plug-in, user replaceable
	Integrated transceiver, 8 Frequency Channels and 4 Groups with full RX features		External Transceiver RX required for full RX features		
	5 V (compatible with all cameras)		5 V (compatible with all cameras)		
	3.5 mm Jack		3.5 mm Jack and EL-Amphenol		
	Microprocessor controlled fan with thermal cut-out		1 fan		2 fans
	Centred tube for EL-umbrellas ø 7 mm. Stand bracket with extra umbrella fitting for larger umbrella shafts		Centred tube for EL-umbrellas ø 7 mm. Stand bracket with extra umbrella fitting for larger umbrella shafts		
	150 W (during charge: 380 W)	150 W (during charge: 490 W)	250 W (during charge: 550 W)	250 W (during charge: 660 W)	330 W (during charge: 740 W)
	180 W (during charge: 270 W)	180 W (during charge: 380 W)	170 W (during charge: 420 W)	170 W (during charge: 440 W)	280 W (during charge: 460 W)
	28 x 14 x 23 cm		27.5 x 13 x 22 cm		36.5 x 13 x 22 cm
	1.85 kg (4.0 lb.)	2.05 kg (4.5 lb.)	2.3 kg (5 lb.)	2.6 kg (5.7 lb.)	3.4 kg (7.6 lb.)
	Mains cable, sync cable, flashtube, modelling lamp and protective cap		Mains cable, sync cable, flashtube, modelling lamp and protective cap		
	20440.1	20441.1	230 V : 20625.1s 110 V : 20725.1s	230 V : 20626.1s 110 V : 20726.1s	230 V : 20627.1s 110 V : 20727.1s

POWER PACKS

DIGITAL RX

	DIGITAL RX 1200	DIGITAL RX 2400
Energy (Ws/J)	1200	2400
Power distribution	Symmetrical	
F-Stop (1m, 100 ISO, reflector 48°)	128	180
Power range f-stop	6	
Power range Ws	37 – 1200	75 - 2400
Power range	1/1 - 1/32	
Power increments in f-stop	1/10	
Flash duration t0.5 with Zoom Pro / Pro HD at max. power in s.	1/1500	1/830
Flash duration t0.5 with Zoom Action at max. power in s.	1/2800	1/1410
Recycling 230 V FAST / SLOW in s.	0.24 – 1.0 / 0.35 – 1.9	0.4 – 1.9 / 0.55 – 3.6
Recycling 115 V FAST / SLOW in s.	0.6 – 1.7 / 0.6 – 2.2	0.6 – 3.8 / 0.8 – 5
Colour temperature in °K at max. power	5500	
Auto Power Dumping	Adjusts power settings automatically	
Power stability	± 0.5%	
Modelling lamp mode	On, proportional, off, free	
EL-Skyport	External Transceiver RX required for full RX features	
Sync voltage	5 V (compatible with all cameras)	
Sync socket	3.5 mm Jack and EL-Amphenol	
Fan Cooled	All models	
Max. power consumption (230 V / 50 Hz)	30 W (during charge : 1100 W)	30 W (during charge : 1320 W)
Max. power consumption (115 V / 60 Hz)	30 W (during charge : 780 W)	30 W (during charge : 940 W)
Dimensions	22 x 13 x 23 cm	22 x 13 x 32 cm
Weight	4.6 kg (10.1 lb.)	6.6 kg (14.5 lb.)
Supplied with	Mains cable and Sync Cord	
230 V 50 – 60 Hz N°	10256.1s	10258.1s
115 V 50 – 60 Hz N°	10255.1s	10257.1s

DIGITAL RX – RINGFLASH

	RINGFLASH 3000
Flash capacity (J/J)	Up to 3000
F-Stop (2m, 100 ISO)	22.5 (Digital RX 1200)
Compatible power packs	All Elinchrom power packs since 1981
Flash duration at max. power t0.5	1/2600 (Digital RX 1200)
Flash duration at min. power t0.5	1/1920 (Digital RX 1200)
Colour temperature in °K at max. power	5500
Flashtube	4 pole - Action
Inner diameter	10 cm
Outer diameter	20 cm
Cable length	5 m
Camera / Tripod adapter	1/4" // 1/4" and 3/8"
Matt glass diffuser, optional	402.013
UV coated protection glass filter, spare part	402.012
Dimensions	23 x 20 x 32 cm
Weight, including cable	1.9 kg (4.1 lb.)
Supplied with	UV coated protection glass filter and flash cable
N°	20494

POWER PACKS

DIGITAL RX – ZOOM HEADS

	ZOOM PRO HD	ZOOM ACTION	ZOOM PRO
Flash capacity (J/J)	Up to 3000		
Compatible power packs	All Elinchrom power packs since 1981		
Flash duration t0.5 on Digital RX 1200	1/1500	1/2800	1/1500
Flash duration t0.5 on Digital RX 2400	1/830	1/1410	1/830
Colour temperature in °K at max. power	5500		
Multivoltage	All Zoom Heads can be used with either 115 V or 230 V EL power packs. Only the Halogen and the fuse must apply to the correct voltages and values!		
Modelling lamp on/off	All models		
Modelling lamp 230 V	Standard configuration : 300 W / 230 V Halogen GX 6.35 // 23022		
Modelling lamp 115 V	Standard configuration : 300 W / 115 V Halogen GX 6.35 // 23030		
Flashtube	n° 24082: Plug-in, user replaceable Quartz – Heavy Duty	n° 24083: Plug-in, user replaceable Super short flash duration	n° 24081: Plug-in, user replaceable Quartz - Standard
Fan cooled	Electronically intelligent temperature controlled fan. At high internal temperature the modelling switches off. After cooling down the modelling lamp switches back on automatically		
Umbrella fitting	Centred tube for EL-umbrellas ø 7 mm. Stand bracket with extra umbrella fitting for larger umbrella shafts		
Tripod adapter	Standard 5/8"		
Glass Dome Frosted, optional	24919		
Dimensions (with protective cap)	24.5 x 15.5 x 20.5 cm		
Weight	2.3 kg (5.0 lb.)	2.33 kg (5.1 lb.)	2.3 kg (5.0 lb.)
Supplied with	5 m Flash Cable, Glass Dome transparent, Halogen Lamp and Plug-in Flashtube		
N°	20192	20193	20191

DIGITAL RX – SPECIAL HEADS

	TWIN X4	X 6000 N
Flash capacity (J/J)	Up to 2x 2400	Up to 2x 3000
Compatible power packs	All Elinchrom power packs since 1981	
Colour temperature in °K at max. power	5500	
Modelling light on / off	All models	
Halogen lamp 230 V	Standard configuration : 300 W / 230 V Halogen GX 6.35 / 23022	
Halogen lamp 110 V	Standard configuration : 300 W / 110 V Halogen GX 6.35 / 23030	
Flashtube N°	2x 24035	2x 24069
Fan cooled	All models	
Umbrella fitting	Centred tube for EL-umbrellas ø 7 mm. Stand bracket with extra umbrella fitting for larger umbrella shafts	
Tripod adapter	Standard 5/8"	
Glass Domes, optional	Transparent: 24925 / Frosted: 24926 / 400K° warm: 24927	
Dimensions (with protective cap)	22.5 x 14.5 x 20.5 cm	
Weight	3.3 kg (7.2 lb.)	3.3 kg (7.2 lb.)
Supplied with	2x 5 m Flash Cable, Halogen Lamp and Twin flashtube	
230 V 50 – 60 Hz N°	20180	20182
115 V 50 – 60 Hz N°	20181	20183

BATTERY FLASH SYSTEM

RANGER RX

	RANGER RX	RANGER RX SPEED	RANGER RX SPEED AS
Flash capacity (Ws/J)	1100		
Power distribution	Symmetrical		Asymmetrical, 2:1 ratio
F-Stop (2m, 100 ISO, reflector 48°)	64		At 100%: 64 — At 66%: 45 — At 33%: 32
Power range f-stop	7		8.5
Power range Ws	17 – 1100		100%: 17 – 1100 66%: Output A: 11.5 – 733 33%: Output B: 5.7 - 366
Power range	1/1 - 1/64		1/1 - 1/64
Power increments in f-stop	1/10		
Flash duration t0.5 max. power: 1 / 2 A heads	1/2300 / 1/4310		Output A: 1/2300 / 1/4310 — Output B: 1/5120
Flash duration t0.5 max. power: 1 / 2 S heads	1/1250 / 1/2250		Output A: 1/1250 / 1/2250 — Output B: 1/2310
Recycling, FAST, in s.	0.5 – 5.5	0.3 – 3.0	Output A: 0.3 – 3.0 — Output B: 0.19 – 1.2
Recycling, SLOW, in s.	0.9 – 14	0.45 – 5.5	Output A: 0.45 – 5.5 — Output B: 0.22 – 1.9
Colour temperature in °K at max. power	5500		
Auto Power Dumping	Adjusts power settings automatically		
Power stability	± 0.5%		
Modelling lamp mode	On, 15 s., 30 s., off		
Flashes out of one charged battery at min. power, SLOW / FAST recycle	3800 / 2600	5100 / 3700	
Flashes out of one charged battery at max. power, SLOW / FAST recycle	140 / 110	250 / 195	
Battery (Lead-Gel)	12 V / 7 Ah	12 V / 12 Ah	
Standard charge: approx. recharge time	3 h	5 h	
Quick charger: approx. recharge time	Not compatible	3 h	
EL-Skyport	External Transceiver RX and 19374 adapter required for full RX features		
Sync voltage	5 V (compatible with all cameras)		
Sync socket	EL-Amphenol		
Dimensions	19 x 14 x 24 cm	19 x 14 x 28 cm	
Weight	6.5 kg (14.3 lb.)	8 kg (17.6 lb.)	
Supplied with	19290 + 11075 + 19289 + 19293 + 19374	19280 + 11075 + 19289 + 19283 + 19374	19280 + 11075 + 19289 + 19283 + 19374
N° Ranger pack with included parts	10263.1s	10265.1s	10267.1s

RANGER RX – RINGFLASH

	RANGER RINGFLASH 1500
Flash capacity (Ws/J)	Up to 1100
F-Stop (2m, 100 ISO)	22.5 (Ranger RX series)
Compatible power packs	Ranger RX series and Ranger Quadra series with Adapter cable 11036
Flash duration at max. power t0.5	1/2600 (Ranger RX series)
Flash duration at min. power t0.5	1/1920 (Ranger RX series)
Colour temperature in °K at max. power	5500
Flashtube	4 pole - Action
Inner diameter	10 cm
Outer diameter	20 cm
Cable length	2 m
Camera / Tripod adapter	1/4" // 1/4" and 3/8"
Matt glass diffuser, optional	402.013
UV coated protection glass filter, spare part	402.012
Dimensions	23 x 20 x 32 cm
Weight, including cable	1.8 kg (3.9 lb.)
Supplied with	UV coated protection glass filter and flash cable
N°	20493

BATTERY FLASH SYSTEM & CONTINUOUS LIGHT

RANGER RX – HEADS

	RANGER S	RANGER A
Flash capacity (Ws/J)	Up to 1100	
Compatible power packs	Ranger RX series and Ranger Quadra series with Adapter cable 11036	
Flash duration t0.5 1 head at max. power	1/1160 1/2310 on output B of Ranger RX Speed AS	1/2300 1/5120 on output B of Ranger RX Speed AS
Flash duration t0.5 2 heads at max. power	1/2250	1/4310
Colour temperature in °K at max. power	5500	
Modelling light on / off	All models	
Modelling lamp	50 W 12 V	
Flashtube N°	24034 : Standard	24053 : Action
Umbrella fitting	Centred tube for EL-umbrellas ø 7 mm. Stand bracket with extra umbrella fitting for larger umbrella shafts	
Tripod adapter	Standard 5/8"	
Dimensions (with protective cap)	24 x 14 x 21 cm	
Weight, including cable	2.4 kg (5.2 lb.)	
Supplied with	Flash cable, flashtube, modelling lamp and protective cap	
N°	20100	20101

SCANLITE

	650 W		300 W	
Voltage	230 V	120 V	230 V	120 V
Aperture 2m / 100 ISO / 1/30 s 48° Zoom Pos. 0	11	8.0 ⁷ / ₁₀	8.0	5.6 ⁷ / ₁₀
Lux	12500	9500	8500	5500
Lumen	20000	20000	9600	8100
Colour temperature in °K	3200			
Multivoltage	Scanlite Heads can be used with either 110 V or 230 V. Only the Halogen and the fuse must apply to the correct voltages and values!			
Controls	Modelling lamp on/off and Zoom function			
Modelling lamp 230 V	Standard configuration : 300 W / 230 V Halogen GX 6.35 // 23022			
Modelling lamp 115 V	Standard configuration : 300 W / 110 V Halogen GX 6.35 // 23030			
Fan cooled	Electronically intelligent temperature controlled fan. At high internal temperature the modelling switches off. After cooling down the modelling lamp switches back on automatically			
Umbrella fitting	Centered tube for EL-umbrellas ø 7 mm. Stand bracket with extra umbrella fitting for larger umbrella shafts			
Tripod adapter	Standard 5/8"			
Glass Dome Frosted, optional	24919			
Dimensions (with protective cap)	24.5 x 15.5 x 20.5 cm			
Weight	1.2 kg (2.6 lb.)			
Supplied with	Mains cable, Glass Dome transparent and Halogen Lamp 300 W / 650 W			
N°	20998			

BATTERY FLASH SYSTEM

RANGER QUADRA HYBRID

	RANGER QUADRA HYBRID LITHIUM-ION	RANGER QUADRA HYBRID LEAD-GEL
Energy (Ws/J)	400	
Power distribution	Asymmetrical, 2:1 ratio	
F-Stop (1m, 100 ISO, reflector 48°)	At 100% : 64.5	
Power range f-stop	6,6	
Power range Ws	100% : 25 - 400 66% : Output A: 17 - 268 33% : Output B: 8.2 - 132	
Power range	1/1 – 1/32	
Power increments in f-stop	1/10 to programmable 5/10 - 1/1	
Flash duration t0.5 at max. power in s. : RQ S / A head	Output A (100%) : 1/1200 / 1/2800 Output B (33%) : 1/3000 / 1/5700 Output A+B (100%) : 1/1500 / 1/4000	
Recycling, FAST in s.	Output A: 0.36 - 2.0 Output B: 0.17 – 0.73	Output A: 0.41 – 2.26 Output B: 0.18 – 0.8
Recycling, SLOW in s.	Output A: 0.86 – 6.6 Output B: 0.33 – 2.3	Output A: 0.95 – 7.8 Output B: 0.37 – 2.7
Colour temperature in °K at max. power	5500	
Auto Power Dumping	Adjusts power settings automatically	
Power stability	± 0.5%	
Modelling lamp mode	On, off, programmable timer and continuous	
Flashes out of one charged battery at min. power, SLOW / FAST recycle	4800 / 4200	2000 / 1500
Flashes out of one charged battery at max. power, SLOW / FAST recycle	320 / 280	140 / 110
Battery	Lithium-Ion 16.8 V / 3.3 Ah	Lead-Gel 12 V / 3.6 Ah
Quick charger : approx. recharge time	1 h 30 min	2h min
EL-Skyport (Built-in)	Integrated transceiver, 8 Frequency Channels and 4 Groups with full RX features	
Sync voltage	5 V (compatible with all cameras)	
Sync socket	3.5 mm Jack	
Dimensions : Ranger Quadra battery pack including battery	15 x 8.5 x 18.5 cm	15 x 8.5 x 21 cm
Weight : Quadra Hybrid unit including battery	2 kg	3 kg
Supplied with	Battery box, Charger, Sync cord and Shoulder Strap	
Quadra Hybrid N°	10268.1	10266.1
Spare Quadra Battery Box N°	19295	19294

BATTERY FLASH SYSTEM

RANGER QUADRA HYBRID – FLASH HEADS


	QUADRA HYBRID S	QUADRA HYBRID A
Flash capacity (Ws/J)	Up to 400	
Compatible battery packs	Ranger Quadra series only	
Flash duration t0.5 1 head at max. power	Output A (100%) : 1/1200 Output B (33%) : 1/3000 Output A+B (100%) : 1/1500	Output A (100%) : 1/2800 Output B (33%) : 1/5700 Output A+B (100%) : 1/4000
Colour temperature in °K at max. power	5500	
Modelling lamp	LED 20 W (approx. 50 W Halogen)	
Flashtube N°	24009 : Standard	24000 : Action
Umbrella fitting	Centred tube for EL-umbrellas ø 7 mm.	
Tripod adapter	Standard 5/8"	
Dimensions (with Multifunction Cap)	9 x 8 x 11 cm	
Weight (Head + 2.5 m cable)	0,25 kg + 0,4 kg	
Supplied with	2.5 m flash cable, flashtube Reflector 13.5 cm and Multifunction Cap	
N°	20139	20134

RANGER QUADRA HYBRID – RINGFLASH

	RINGFLASH PRO	RINGFLASH ECO
Flash capacity (Ws/J)	400	
F-Stop (2m, 100 ISO)	16.0	11.8 (-0.5 with white diffuser)
Compatible power packs	Ranger Quadra series only	
Flash duration at max. power t0.5	Output A : 1/1950 Output B : 1/4500	Output A : 1/1000 Output B : 1/2500
Flash duration at min. power t0.5	Output A : 1/1400 Output B : 1/2700	Output A : 1/600 Output B : 1/1400
Colour temperature in °K at max. power	5500	
Flashtube	4 pole - Action	2 pole - Standard
Inner diameter	10 cm	9.5 cm
Outer diameter	20 cm	
Cable length	2 m	
Camera / Tripod adapter	1/4" // 1/4" and 3/8"	
Matt glass diffuser, optional	Optional, 402.013	Included white Plexiglas diffuser
UV coated protection glass filter, spare part	402.012	–
Dimensions	23 x 20 x 32 cm	21 x 20 x 21 cm
Weight, including cable	1.5 kg (3.3 lb.)	1 kg (2.2 lb.)
Supplied with	UV coated protection glass filter and 2m flash cable	UV coated plastic protection filter, white Plexiglas diffuser and detachable 2 m flash cable
N°	20495	20492



elinchrom®
creative image lighting technology



STARTER COMPACTS



D-Live Web Time *1 hour*
Challenge: Speed Reading



5. Output Symbolic Speed

ADVANCED COMPACTS



20-0-2000 00:00:00
 20-0-2000 00:00:00
 20-0-2000 00:00:00



B. Support Transmitter Speed

ENTRY PRO COMPACTS



WWW SITE [www.](#)



E. Signal Transmitter Speed


PROFESSIONAL RX COMPACTS



Style 802-200	802
Style 802-200	802
Style 802-200	802



U.S. Department of Agriculture, Forest Service, Pacific Northwest Research Station, 3200 SW Jefferson Way, Corvallis, OR 97331

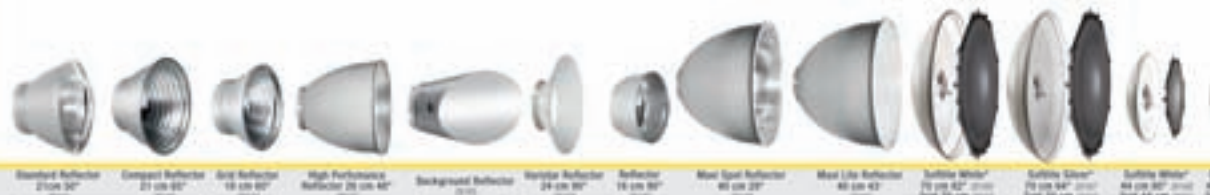

BATTERY FLASH SYSTEM

POWER PACK SYSTEM

FOR ALL ELINCHROM RX UNITS



Quadra Hybrid 45 RX
1200mAh/1500mAh
1200mAh/1500mAh



Ranger RX Speed 40
1200mAh/1500mAh

Ranger RX
1200mAh/1500mAh

Ranger RX Speed
1200mAh/1500mAh



Digital RX 1200
1200mAh/1500mAh

Digital RX 2400
1200mAh/1500mAh



EL-Receiver 8001
1200mAh

UNIVERSAL RECEIVERS



EL-Receiver Universal
1200mAh

EL-Receiver Universal Set
1200mAh



HANGER ACCESSORIES



Zoom Heads

Power Flash Heads



Zoom Active
1200mAh

Zoom Pro
1200mAh

Zoom Pro HD
1200mAh

Power Flash Head
1200mAh

Power Flash Head
1200mAh



SPECIAL LIGHT EFFECT

Softbox Silver
45cm/18"

Square Softbox
45cm/18"

Speed with Speed
45cm/18"

Mini Spot Lite
45cm/18"

Zoom Spot
45cm/18"

Filter Spots
45cm/18"

Softbox Silver
45cm/18"

Square Softbox
45cm/18"

Speed with Speed
45cm/18"

Mini Spot Lite
45cm/18"

Zoom Spot
45cm/18"

Filter Spots
45cm/18"

Softbox Silver
45cm/18"

Square Softbox
45cm/18"

Speed with Speed
45cm/18"

Mini Spot Lite
45cm/18"

Zoom Spot
45cm/18"

Filter Spots
45cm/18"

Softbox Silver
45cm/18"

Square Softbox
45cm/18"

Speed with Speed
45cm/18"

Mini Spot Lite
45cm/18"

Zoom Spot
45cm/18"

Filter Spots
45cm/18"

POWER EFFECT LIGHT




Digital RX
1200mAh/1500mAh

Ringflash 1000
1200mAh/1500mAh

Pro Spot 1000
1200mAh/1500mAh

UMBRELLAS

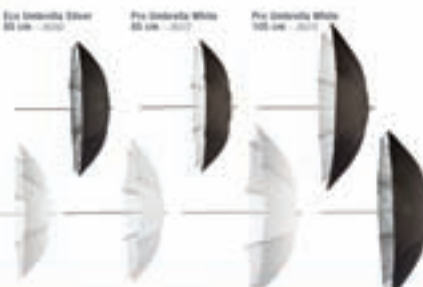

Eye Umbrella Silver
60cm/24"

Pro Umbrella White
60cm/24"

Pro Umbrella White
100cm/40"


Pro Umbrella Silver
100cm/40"

Eye Umbrella Silver
60cm/24"

Pro Umbrella White
60cm/24"

Pro Umbrella White
100cm/40"

Pro Umbrella Silver
100cm/40"

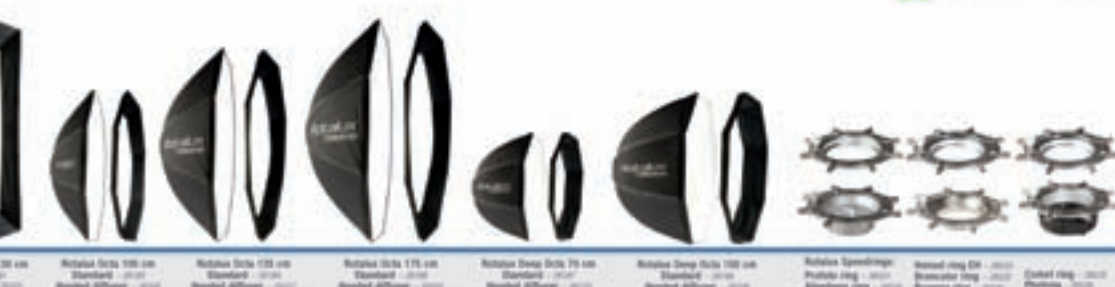

Rotolux Direct 100cm
Standard - 1200mAh/1500mAh

Rotolux Direct 150cm
Standard - 1200mAh/1500mAh

Rotolux Direct 175cm
Standard - 1200mAh/1500mAh

Rotolux Direct 200cm
Standard - 1200mAh/1500mAh

Rotolux Direct 250cm
Standard - 1200mAh/1500mAh

Rotolux Direct 300cm
Standard - 1200mAh/1500mAh

Rotolux Direct 350cm
Standard - 1200mAh/1500mAh

Rotolux Direct 400cm
Standard - 1200mAh/1500mAh

Rotolux Direct 450cm
Standard - 1200mAh/1500mAh

Rotolux Direct 500cm
Standard - 1200mAh/1500mAh

Rotolux Direct 550cm
Standard - 1200mAh/1500mAh

Rotolux Direct 600cm
Standard - 1200mAh/1500mAh

Rotolux Direct 650cm
Standard - 1200mAh/1500mAh

Rotolux Direct 700cm
Standard - 1200mAh/1500mAh

Rotolux Direct 750cm
Standard - 1200mAh/1500mAh

Rotolux Direct 800cm
Standard - 1200mAh/1500mAh

Rotolux Direct 850cm
Standard - 1200mAh/1500mAh

Rotolux Direct 900cm
Standard - 1200mAh/1500mAh

Rotolux Direct 950cm
Standard - 1200mAh/1500mAh

Rotolux Direct 1000cm
Standard - 1200mAh/1500mAh

Rotolux Direct 1050cm
Standard - 1200mAh/1500mAh

Rotolux Direct 1100cm
Standard - 1200mAh/1500mAh

Rotolux Direct 1150cm
Standard - 1200mAh/1500mAh

Rotolux Direct 1200cm
Standard - 1200mAh/1500mAh

Rotolux Direct 1250cm
Standard - 1200mAh/1500mAh

Rotolux Direct 1300cm
Standard - 1200mAh/1500mAh

Rotolux Direct 1350cm
Standard - 1200mAh/1500mAh

Rotolux Direct 1400cm
Standard - 1200mAh/1500mAh

Rotolux Direct 1450cm
Standard - 1200mAh/1500mAh

Rotolux Direct 1500cm
Standard - 1200mAh/1500mAh

Rotolux Direct 1550cm
Standard - 1200mAh/1500mAh

Rotolux Direct 1600cm
Standard - 1200mAh/1500mAh

Rotolux Direct 1650cm
Standard - 1200mAh/1500mAh

Rotolux Direct 1700cm
Standard - 1200mAh/1500mAh

Rotolux Direct 1750cm
Standard - 1200mAh/1500mAh

Rotolux Direct 1800cm
Standard - 1200mAh/1500mAh

Rotolux Direct 1850cm
Standard - 1200mAh/1500mAh

Rotolux Direct 1900cm
Standard - 1200mAh/1500mAh

Rotolux Direct 1950cm
Standard - 1200mAh/1500mAh

Rotolux Direct 2000cm
Standard - 1200mAh/1500mAh

Rotolux Direct 2050cm
Standard - 1200mAh/1500mAh

Rotolux Direct 2100cm
Standard - 1200mAh/1500mAh

Rotolux Direct 2150cm
Standard - 1200mAh/1500mAh

Rotolux Direct 2200cm
Standard - 1200mAh/1500mAh

Rotolux Direct 2250cm
Standard - 1200mAh/1500mAh

Rotolux Direct 2300cm
Standard - 1200mAh/1500mAh

Rotolux Direct 2350cm
Standard - 1200mAh/1500mAh

Rotolux Direct 2400cm
Standard - 1200mAh/1500mAh

Rotolux Direct 2450cm
Standard - 1200mAh/1500mAh

Rotolux Direct 2500cm
Standard - 1200mAh/1500mAh

Rotolux Direct 2550cm
Standard - 1200mAh/1500mAh

Rotolux Direct 2600cm
Standard - 1200mAh/1500mAh

Rotolux Direct 2650cm
Standard - 1200mAh/1500mAh

Rotolux Direct 2700cm
Standard - 1200mAh/1500mAh

Rotolux Direct 2750cm
Standard - 1200mAh/1500mAh

Rotolux Direct 2800cm
Standard - 1200mAh/1500mAh

Rotolux Direct 2850cm
Standard - 1200mAh/1500mAh

Rotolux Direct 2900cm
Standard - 1200mAh/1500mAh

Rotolux Direct 2950cm
Standard - 1200mAh/1500mAh

Rotolux Direct 3000cm
Standard - 1200mAh/1500mAh

Rotolux Direct 3050cm
Standard - 1200mAh/1500mAh

Rotolux Direct 3100cm
Standard - 1200mAh/1500mAh

Rotolux Direct 3150cm
Standard - 1200mAh/1500mAh

Rotolux Direct 3200cm
Standard - 1200mAh/1500mAh

Rotolux Direct 3250cm
Standard - 1200mAh/1500mAh

Rotolux Direct 3300cm
Standard - 1200mAh/1500mAh

Rotolux Direct 3350cm
Standard - 1200mAh/1500mAh

Rotolux Direct 3400cm
Standard - 1200mAh/1500mAh

Rotolux Direct 3450cm
Standard - 1200mAh/1500mAh

Rotolux Direct 3500cm
Standard - 1200mAh/1500mAh

Rotolux Direct 3550cm
Standard - 1200mAh/1500mAh

Rotolux Direct 3600cm
Standard - 1200mAh/1500mAh

Rotolux Direct 3650cm
Standard - 1200mAh/1500mAh

Rotolux Direct 3700cm
Standard - 1200mAh/1500mAh

Rotolux Direct 3750cm
Standard - 1200mAh/1500mAh

Rotolux Direct 3800cm
Standard - 1200mAh/1500mAh

Rotolux Direct 3850cm
Standard - 1200mAh/1500mAh

Rotolux Direct 3900cm
Standard - 1200mAh/1500mAh

Rotolux Direct 3950cm
Standard - 1200mAh/1500mAh

Rotolux Direct 4000cm
Standard - 1200mAh/1500mAh

ROTOLUX INDIRECT



Rotolux Indirect 100cm
Standard - 1200mAh/1500mAh

Rotolux Indirect 150cm
Standard - 1200mAh/1500mAh

Rotolux Indirect 200cm
Standard - 1200mAh/1500mAh

Rotolux Indirect 250cm
Standard - 1200mAh/1500mAh

Rotolux Indirect 300cm
Standard - 1200mAh/1500mAh

Rotolux Indirect 350cm
Standard - 1200mAh/1500mAh

Rotolux Indirect 400cm
Standard - 1200mAh/1500mAh

Rotolux Indirect 450cm
Standard - 1200mAh/1500mAh

Rotolux Indirect 500cm
Standard - 1200mAh/1500mAh

Rotolux Indirect 550cm
Standard - 1200mAh/1500mAh

Rotolux Indirect 600cm
Standard - 1200mAh/1500mAh

Rotolux Indirect 650cm
Standard - 1200mAh/1500mAh

Rotolux Indirect 700cm
Standard - 1200mAh/1500mAh

Rotolux Indirect 750cm
Standard - 1200mAh/1500mAh

Rotolux Indirect 800cm
Standard - 1200mAh/1500mAh

Rotolux Indirect 850cm
Standard - 1200mAh/1500mAh

Rotolux Indirect 900cm
Standard - 1200mAh/1500mAh

Rotolux Indirect 950cm
Standard - 1200mAh/1500mAh

Rotolux Indirect 1000cm
Standard - 1200mAh/1500mAh

Rotolux Indirect 1050cm
Standard - 1200mAh/1500mAh

Rotolux Indirect 1100cm
Standard - 1200mAh/1500mAh

Rotolux Indirect 1150cm
Standard - 1200mAh/1500mAh

Rotolux Indirect 1200cm
Standard - 1200mAh/1500mAh

Rotolux Indirect 1250cm
Standard - 1200mAh/1500mAh

Rotolux Indirect 1300cm
Standard - 1200mAh/1500mAh

Rotolux Indirect 1350cm
Standard - 1200mAh/1500mAh

Rotolux Indirect 1400cm
Standard - 1200mAh/1500mAh

Rotolux Indirect 1450cm
Standard - 1200mAh/1500mAh

Rotolux Indirect 1500cm
Standard - 1200mAh/1500mAh

Rotolux Indirect 1550cm
Standard - 1200mAh/1500mAh

Rotolux Indirect 1600cm
Standard - 1200mAh/1500mAh

Rotolux Indirect 1650cm
Standard - 1200mAh/1500mAh

Rotolux Indirect 1700cm
Standard - 1200mAh/1500mAh

Rotolux Indirect 1750cm
Standard - 1200mAh/1500mAh

Rotolux Indirect 1800cm
Standard - 1200mAh/1500mAh

Rotolux Indirect 1850cm
Standard - 1200mAh/1500mAh

Rotolux Indirect 1900cm
Standard - 1200mAh/1500mAh

ACCESSORIES



Elinchrom Case
For 2 components - 1200mAh/1500mAh



Elinchrom Case
For 2 components - 1200mAh/1500mAh



Elinchrom Case
For 2 components - 1200mAh/1500mAh



Elinchrom Case
For 2 components - 1200mAh/1500mAh



elinchrom[®]
creative image lighting technology